




**Endless statuario**  
COLLECTION

We designed and produced ceramic surfaces in size of 600x1200mm where pragmatism meets beauty, innovation completes tradition, and technology is shaped to human needs.

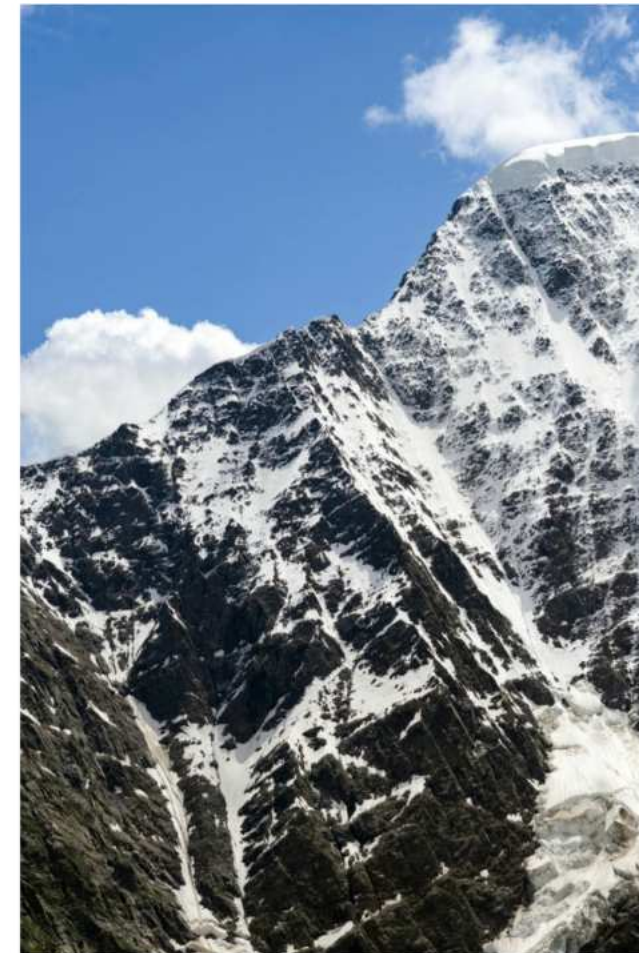

Elevate Your Space with Carving Tiles:  
Where Art Meets Architecture.

# Endless Beauty

---

## COMPANY STATISTICS

**5000+**  
Happy Clients

**40+**  
Export Countries

**250+**  
Creative Design



**SURFACE EXPLOIT ALL  
ARCHITECTURAL  
AND CREATIVE POTENTIAL.**

The Carving collection draws its inspiration from the extraordinary expressive power of concrete and stands out for a wide range of sizes that increase designs' potential. Strong shade variation, sharp patterns and a high tactile vocation transmit a vibrant and modern atmosphere to interiors.



**GLOSSY  
SURFACE**  
with Endless Beauty




# APPLICATIONS + FEATURES

Shades of neutral tones and refined surfaces of timeless simplicity. The perfect synthesis of design, versatility and leading-edge technology, to meet all needs: indoors and outdoors, in residential projects and in the most widely varying commercial and public locations.



## TILES FEATURES



Lightweight  
 Easily  
Handled  
 Slabs



Resistance  
To Deep  
Abrasion



Resistant  
To Thermal  
Shock



Resistance  
To Acids  
And Bases



Does Not  
Absorb  
Liquids



Frost  
Resistance



Fire  
Resistance



Easy  
Cleaning



Stain  
Resistance



Easy To  
Install



Hygienic





# PRODUCT INDEX



Click on the slabs  
below to view  
their separators.



ACRON NATURAL



ATLI GREY



BONTA GREY



CARL BLUE



CENTRA GREY



FIGER MULTI



GINA NATURAL



JORDAN NATURAL



LEROX NATURAL



LIVON NATURAL



MADITA GREY



NILECA GREY



PULLA GREY



PARKER GREY



PARLA NATURAL



PENDORA NATURAL




RIZA GREY



ROX NATURAL



SASTER BLUE

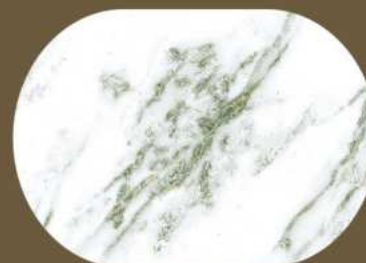

SASTER GREEN



SINDEL BROWN



SNOTA GREY

# PRODUCT INDEX



Click on the slabs  
below to view  
their separators.



VENATI GREY



TANGO GREY



TANGO BLACK



VALING BLUE



VALING BLACK



VALING BROWN



VITRO GREY



VESTAL BROWN



VESTAL GREY



## Endless Statuario Collection

### ACRON NATURAL



Size : 600X1200MM

Finish : GLOSSY

RANDOM : 03

THICKNESS : 9MM

### ATLI GREY




#### TILES FEATURES





Wall & Floor:  
ATLI GREY

Surface:  
GLOSSY

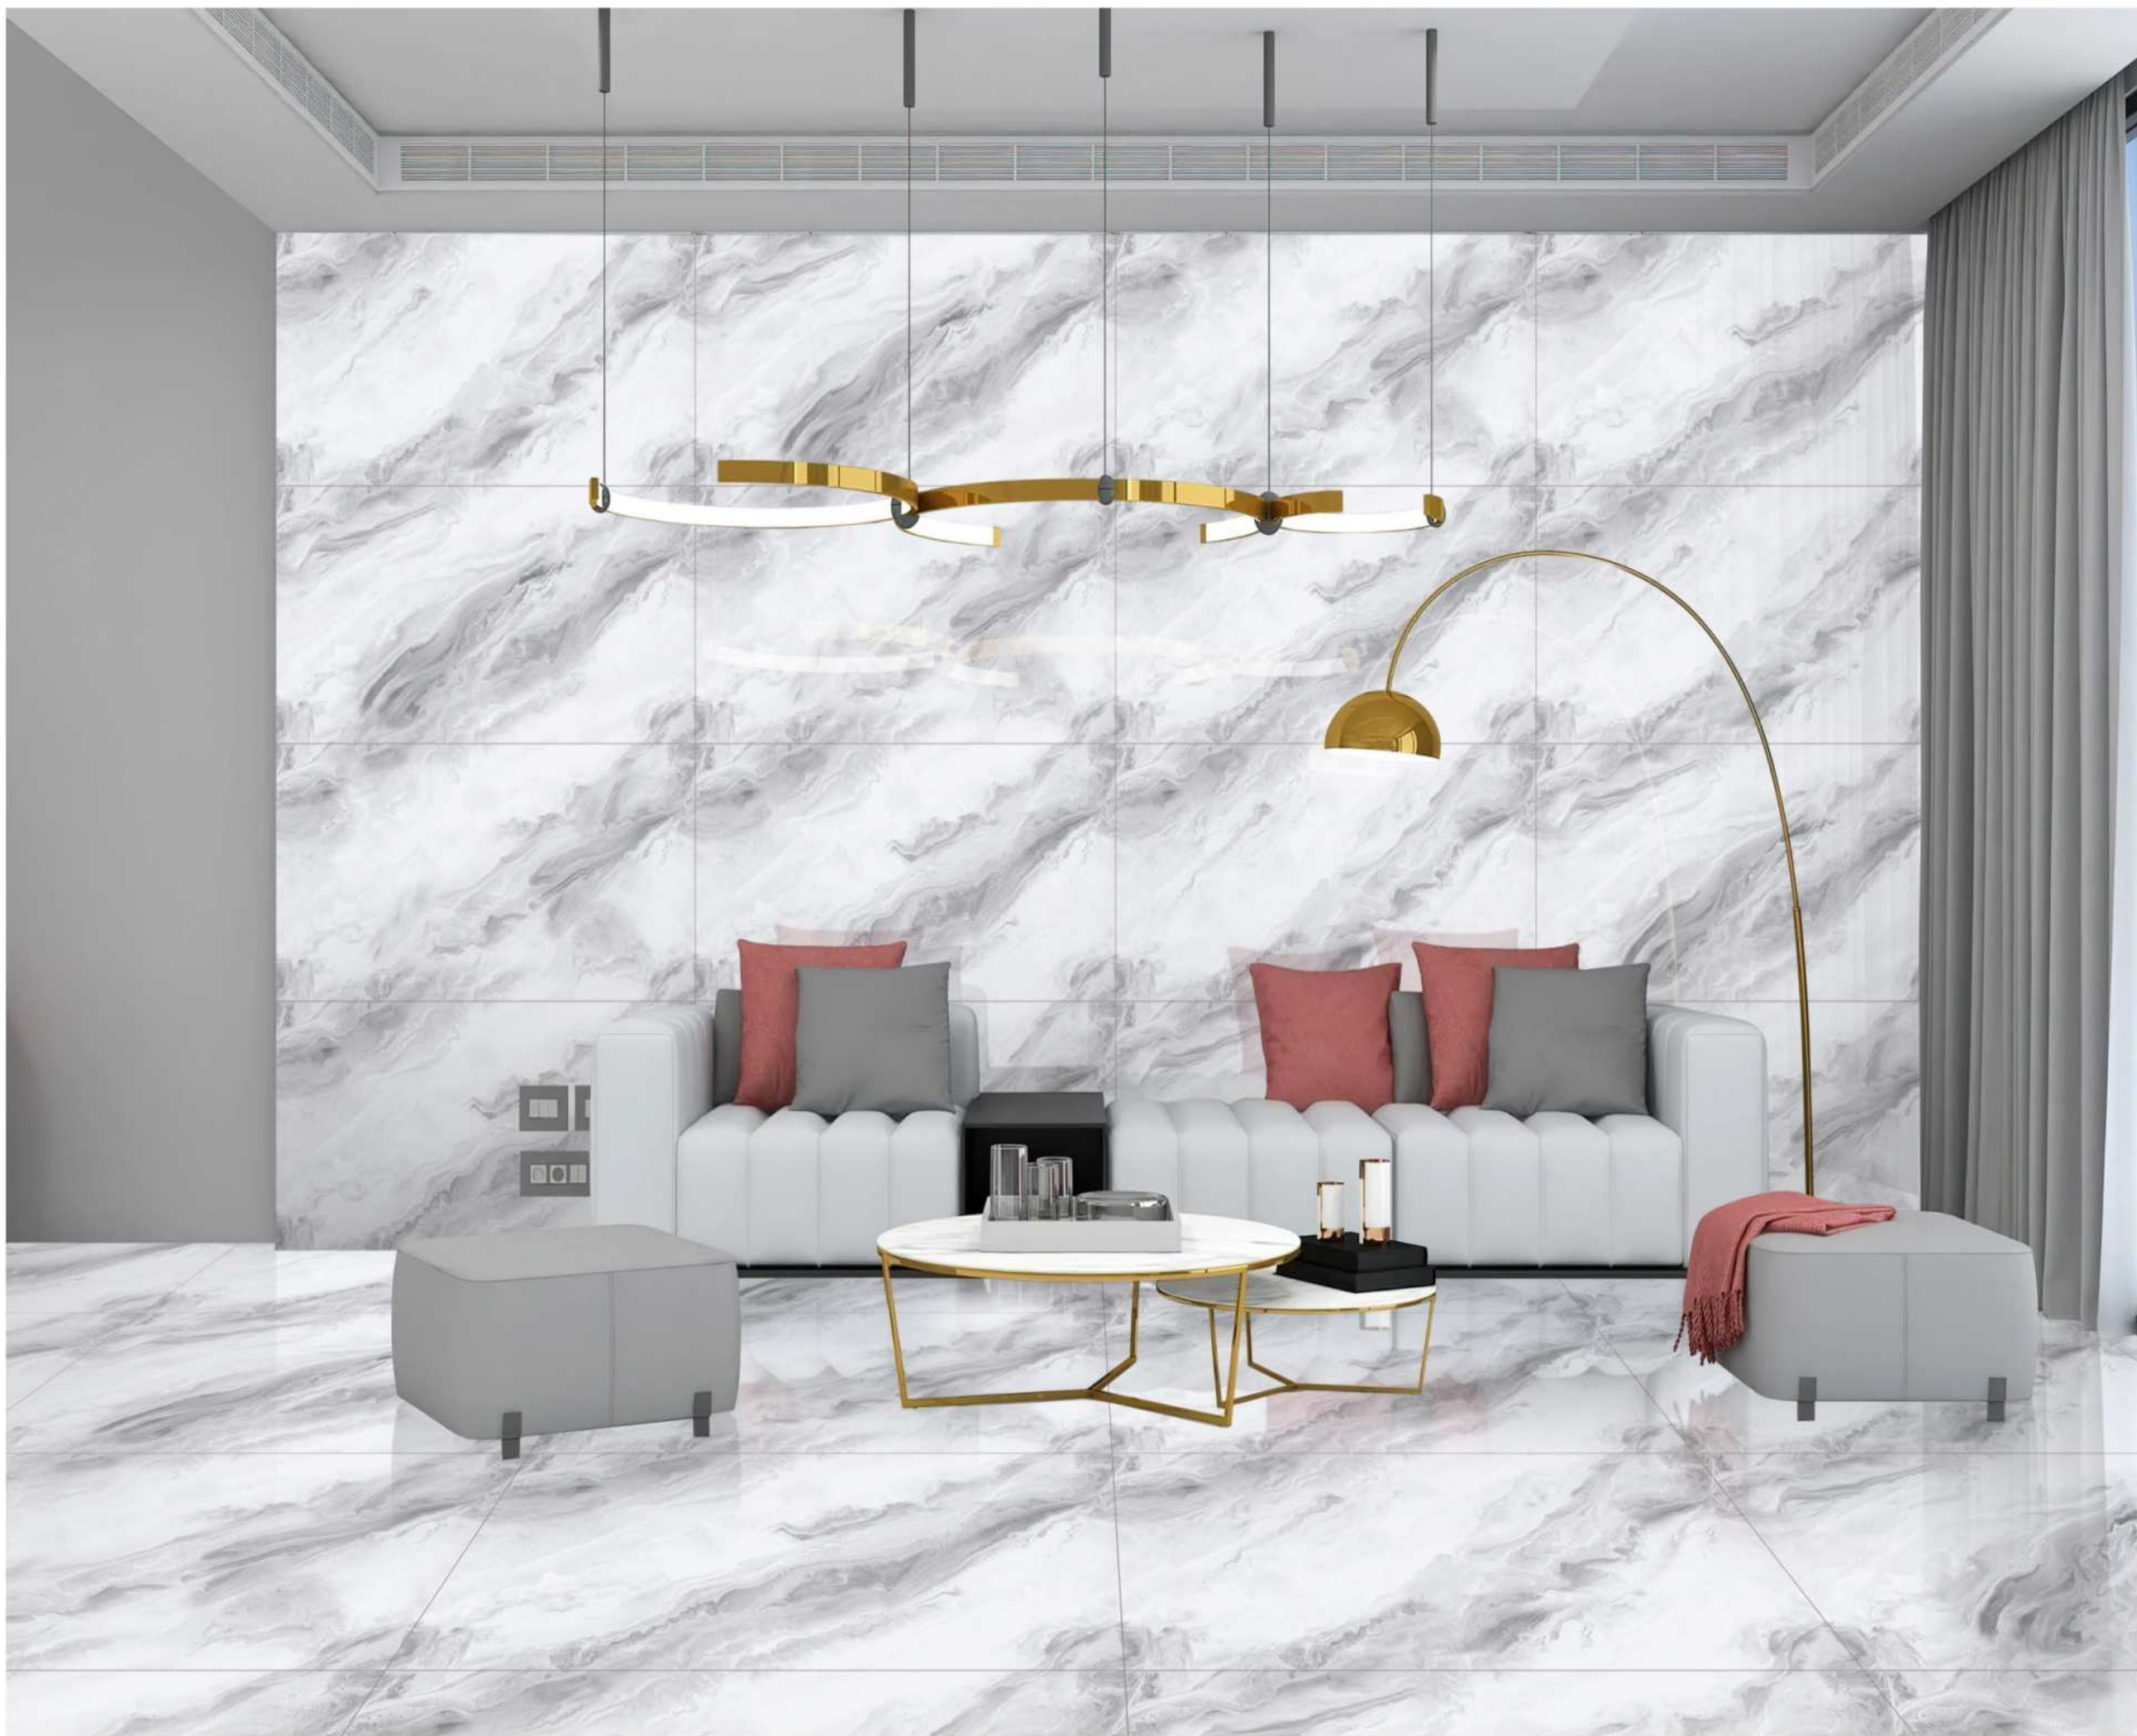



Endless Statuario  
Collection

BONTA GREY



Size : 600X1200MM  
Finish : GLOSSY

RANDOM : 04  
THICKNESS : 9MM

BONTA NATURAL



TILES FEATURES





#Product Book

Floor  
BONTA GREY

Surface:  
GLOSSY





Endless Statuario  
Collection

CARL BLUE



Size : 600X1200MM  
Finish : GLOSSY

RANDOM : 04  
THICKNESS : 9MM

CARL GREY



TILES FEATURES



Floor  
CARL GREY

Surface:  
GLOSSY





Endless Statuario  
Collection


CENTRA GREY



Size : 600X1200MM  
Finish : GLOSSY

RANDOM : 04  
THICKNESS : 9MM

CENTRA BLUE

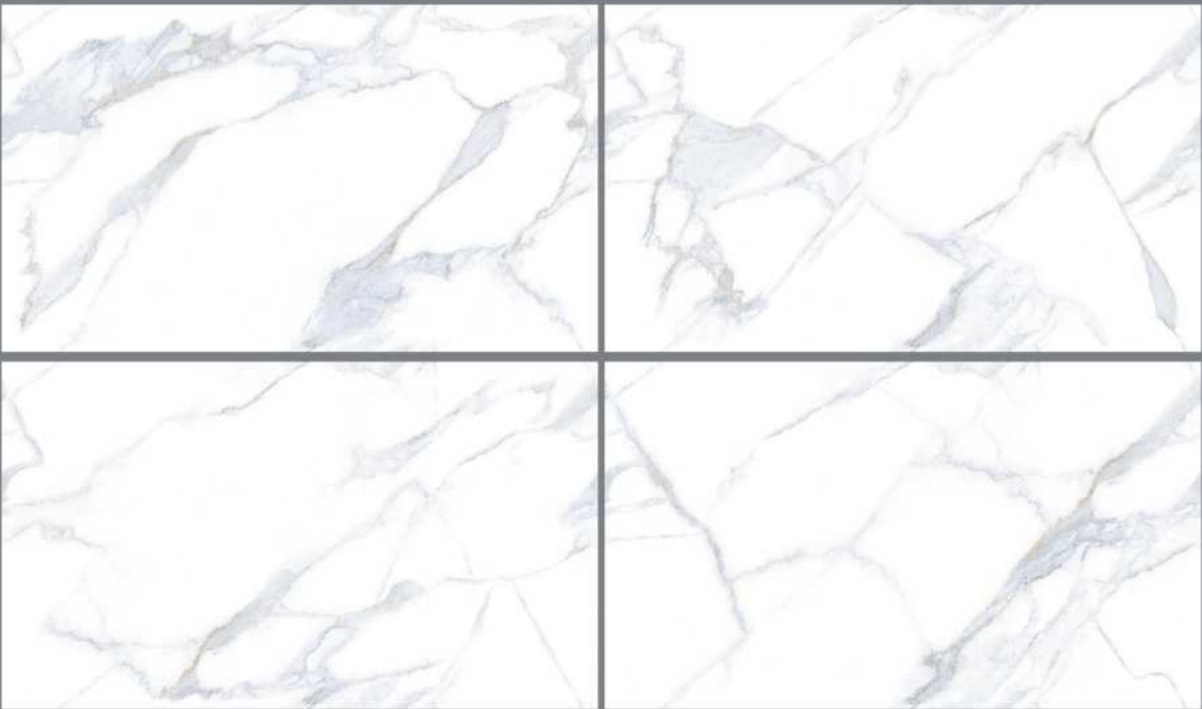

TILES FEATURES



Wall & Floor:  
CENTRA BLUE

Surface:  
GLOSSY





Endless Statuario  
Collection

FIGER MULTI



Size : 600X1200MM  
Finish : GLOSSY

RANDOM : 04  
THICKNESS : 9MM

GINA NATURAL



TILES FEATURES







#Product Book

Floor  
FIGER MULTI

Surface:  
GLOSSY



Endless Statuario  
Collection

JORDAN NATURAL



Size : 600X1200MM  
Finish : GLOSSY

RANDOM : 04  
THICKNESS : 9MM

LEROX NATURAL



TILES FEATURES







#Product Book

Wall & Floor:  
LEROX NATURAL

Surface:  
GLOSSY



Endless Statuario  
Collection

LIVON NATURAL



Size : 600X1200MM  
Finish : GLOSSY

RANDOM : 04  
THICKNESS : 9MM

MADITA GREY



TILES FEATURES





Wall & Floor:  
MADITA GREY

Surface:  
GLOSSY





Endless Statuario  
Collection


NILECA GREY



Size : 600X1200MM  
Finish : GLOSSY

RANDOM : 04  
THICKNESS : 9MM

PULLA GREY

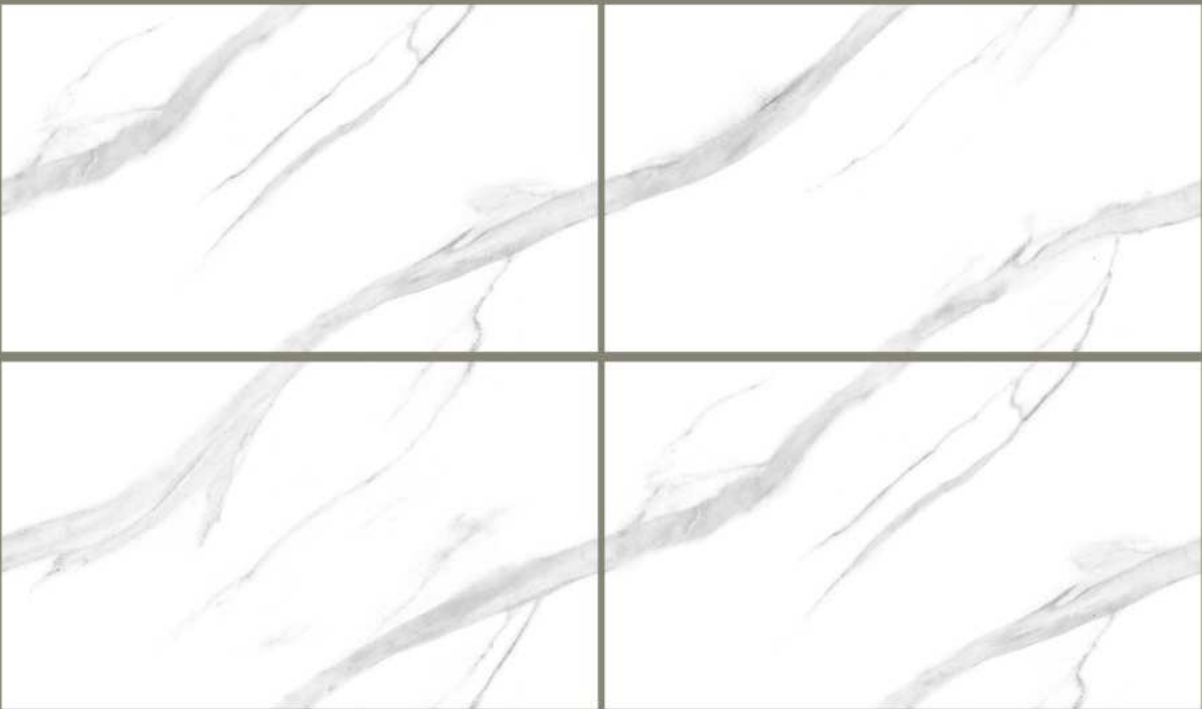

TILES FEATURES







#Product Book

Floor  
NILECA GREY

Surface:  
GLOSSY



Endless Statuario  
Collection

PARKER GRAY



Size : 600X1200MM  
Finish : GLOSSY

RANDOM : 04  
THICKNESS : 9MM

PARLA NATURAL




TILES FEATURES





Wall  
PARKER GRAY

Surface:  
GLOSSY

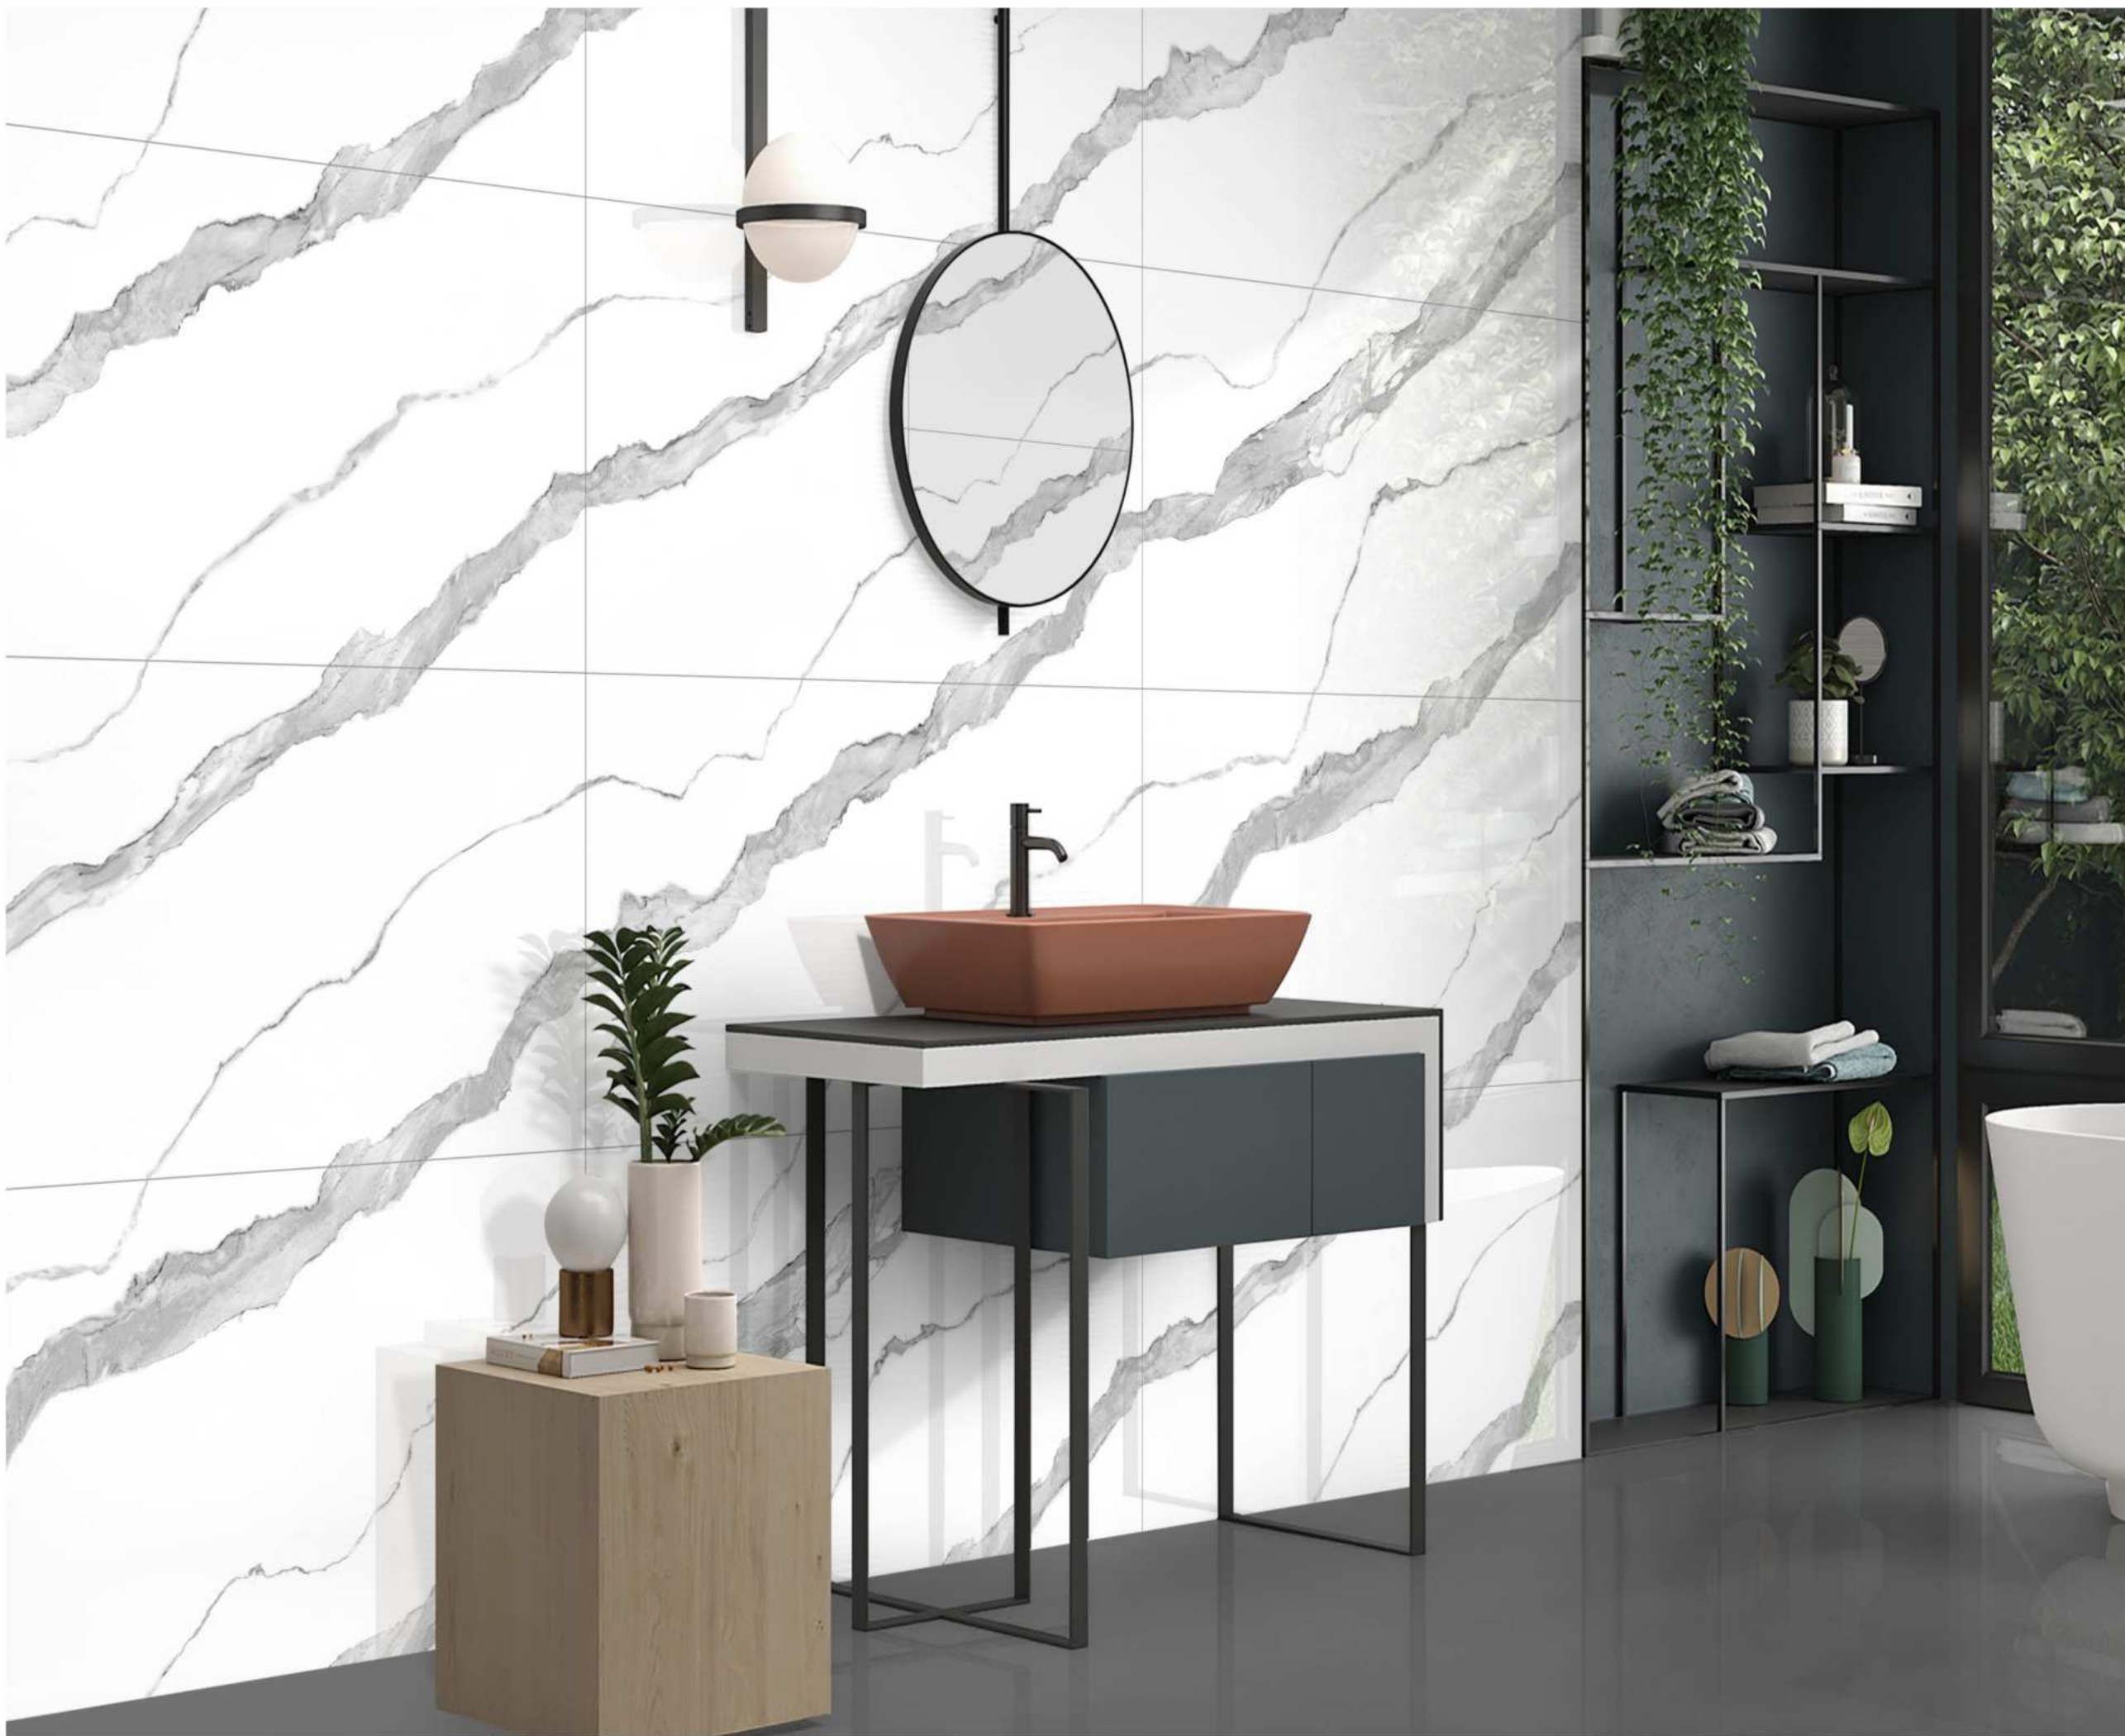

Endless Statuario  
Collection

PENDORA NATURAL



Size : 600X1200MM  
Finish : GLOSSY

RANDOM : 04  
THICKNESS : 9MM

PENDORA VERDE



TILES FEATURES





#Product Book

Wall & Floor:  
PENDORA NATURAL

Surface:  
GLOSSY



Endless Statuario  
Collection

RIZA GREY



Size : 600X1200MM  
Finish : GLOSSY

RANDOM : 04  
THICKNESS : 9MM

ROX NATURAL



TILES FEATURES





Wall & Floor:  
ROX NATURAL


Surface:  
GLOSSY





Endless Statuario  
Collection

SASTER BLUE

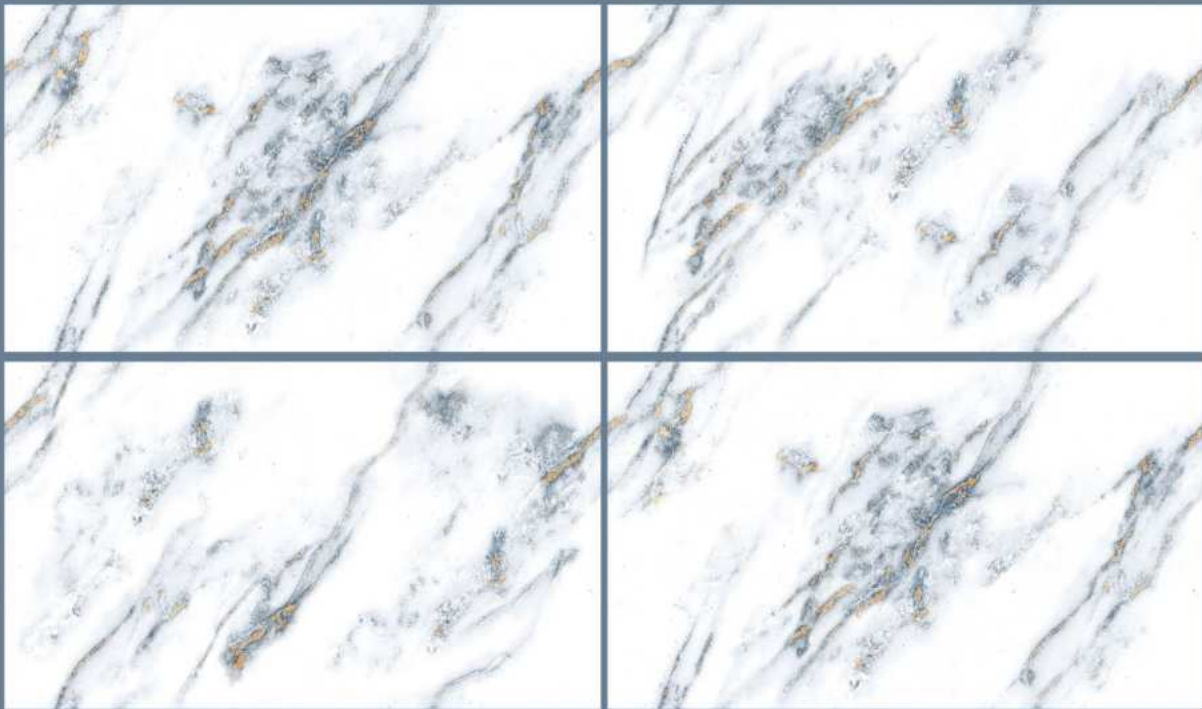

Size : 600X1200MM  
Finish : GLOSSY

RANDOM : 03  
THICKNESS : 9MM

SASTER GRAY



TILES FEATURES







#Product Book


Floor  
SASTER BLUE

Surface:  
GLOSSY



Endless Statuario  
Collection

SASTER GREEN

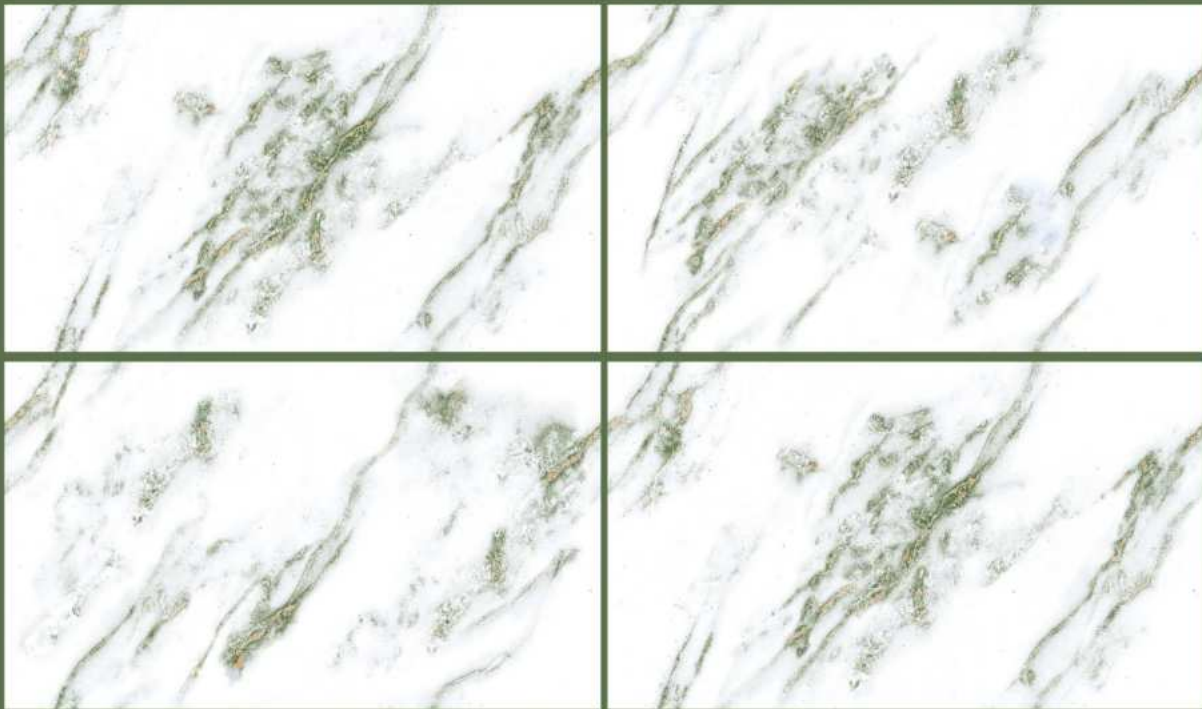

Size : 600X1200MM  
Finish : GLOSSY

RANDOM : 03  
THICKNESS : 9MM

SINDEL BROWN



TILES FEATURES







#Product Book


Wall & Floor:  
SINDEL BROWN

Surface:  
GLOSSY



Endless Statuario  
Collection

SNOTA GREY

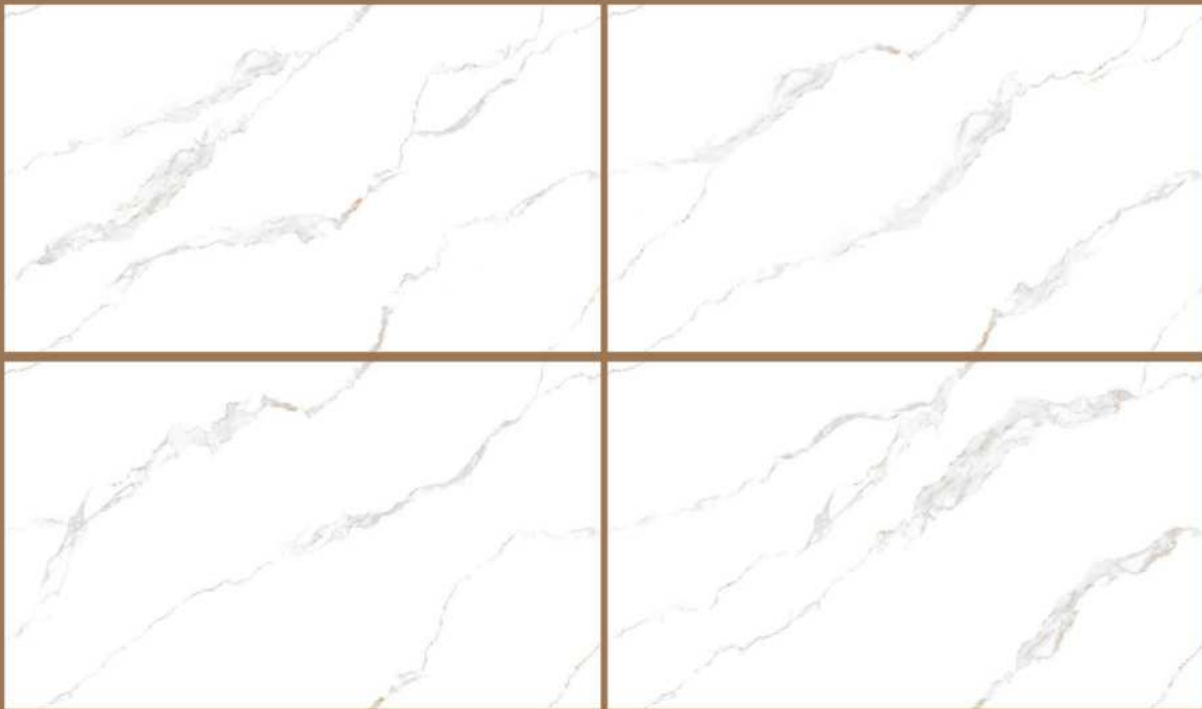

Size : 600X1200MM  
Finish : GLOSSY

RANDOM : 04  
THICKNESS : 9MM

VENATI GREY




TILES FEATURES





Wall & Floor:  
VENATI GREY


Surface:  
GLOSSY

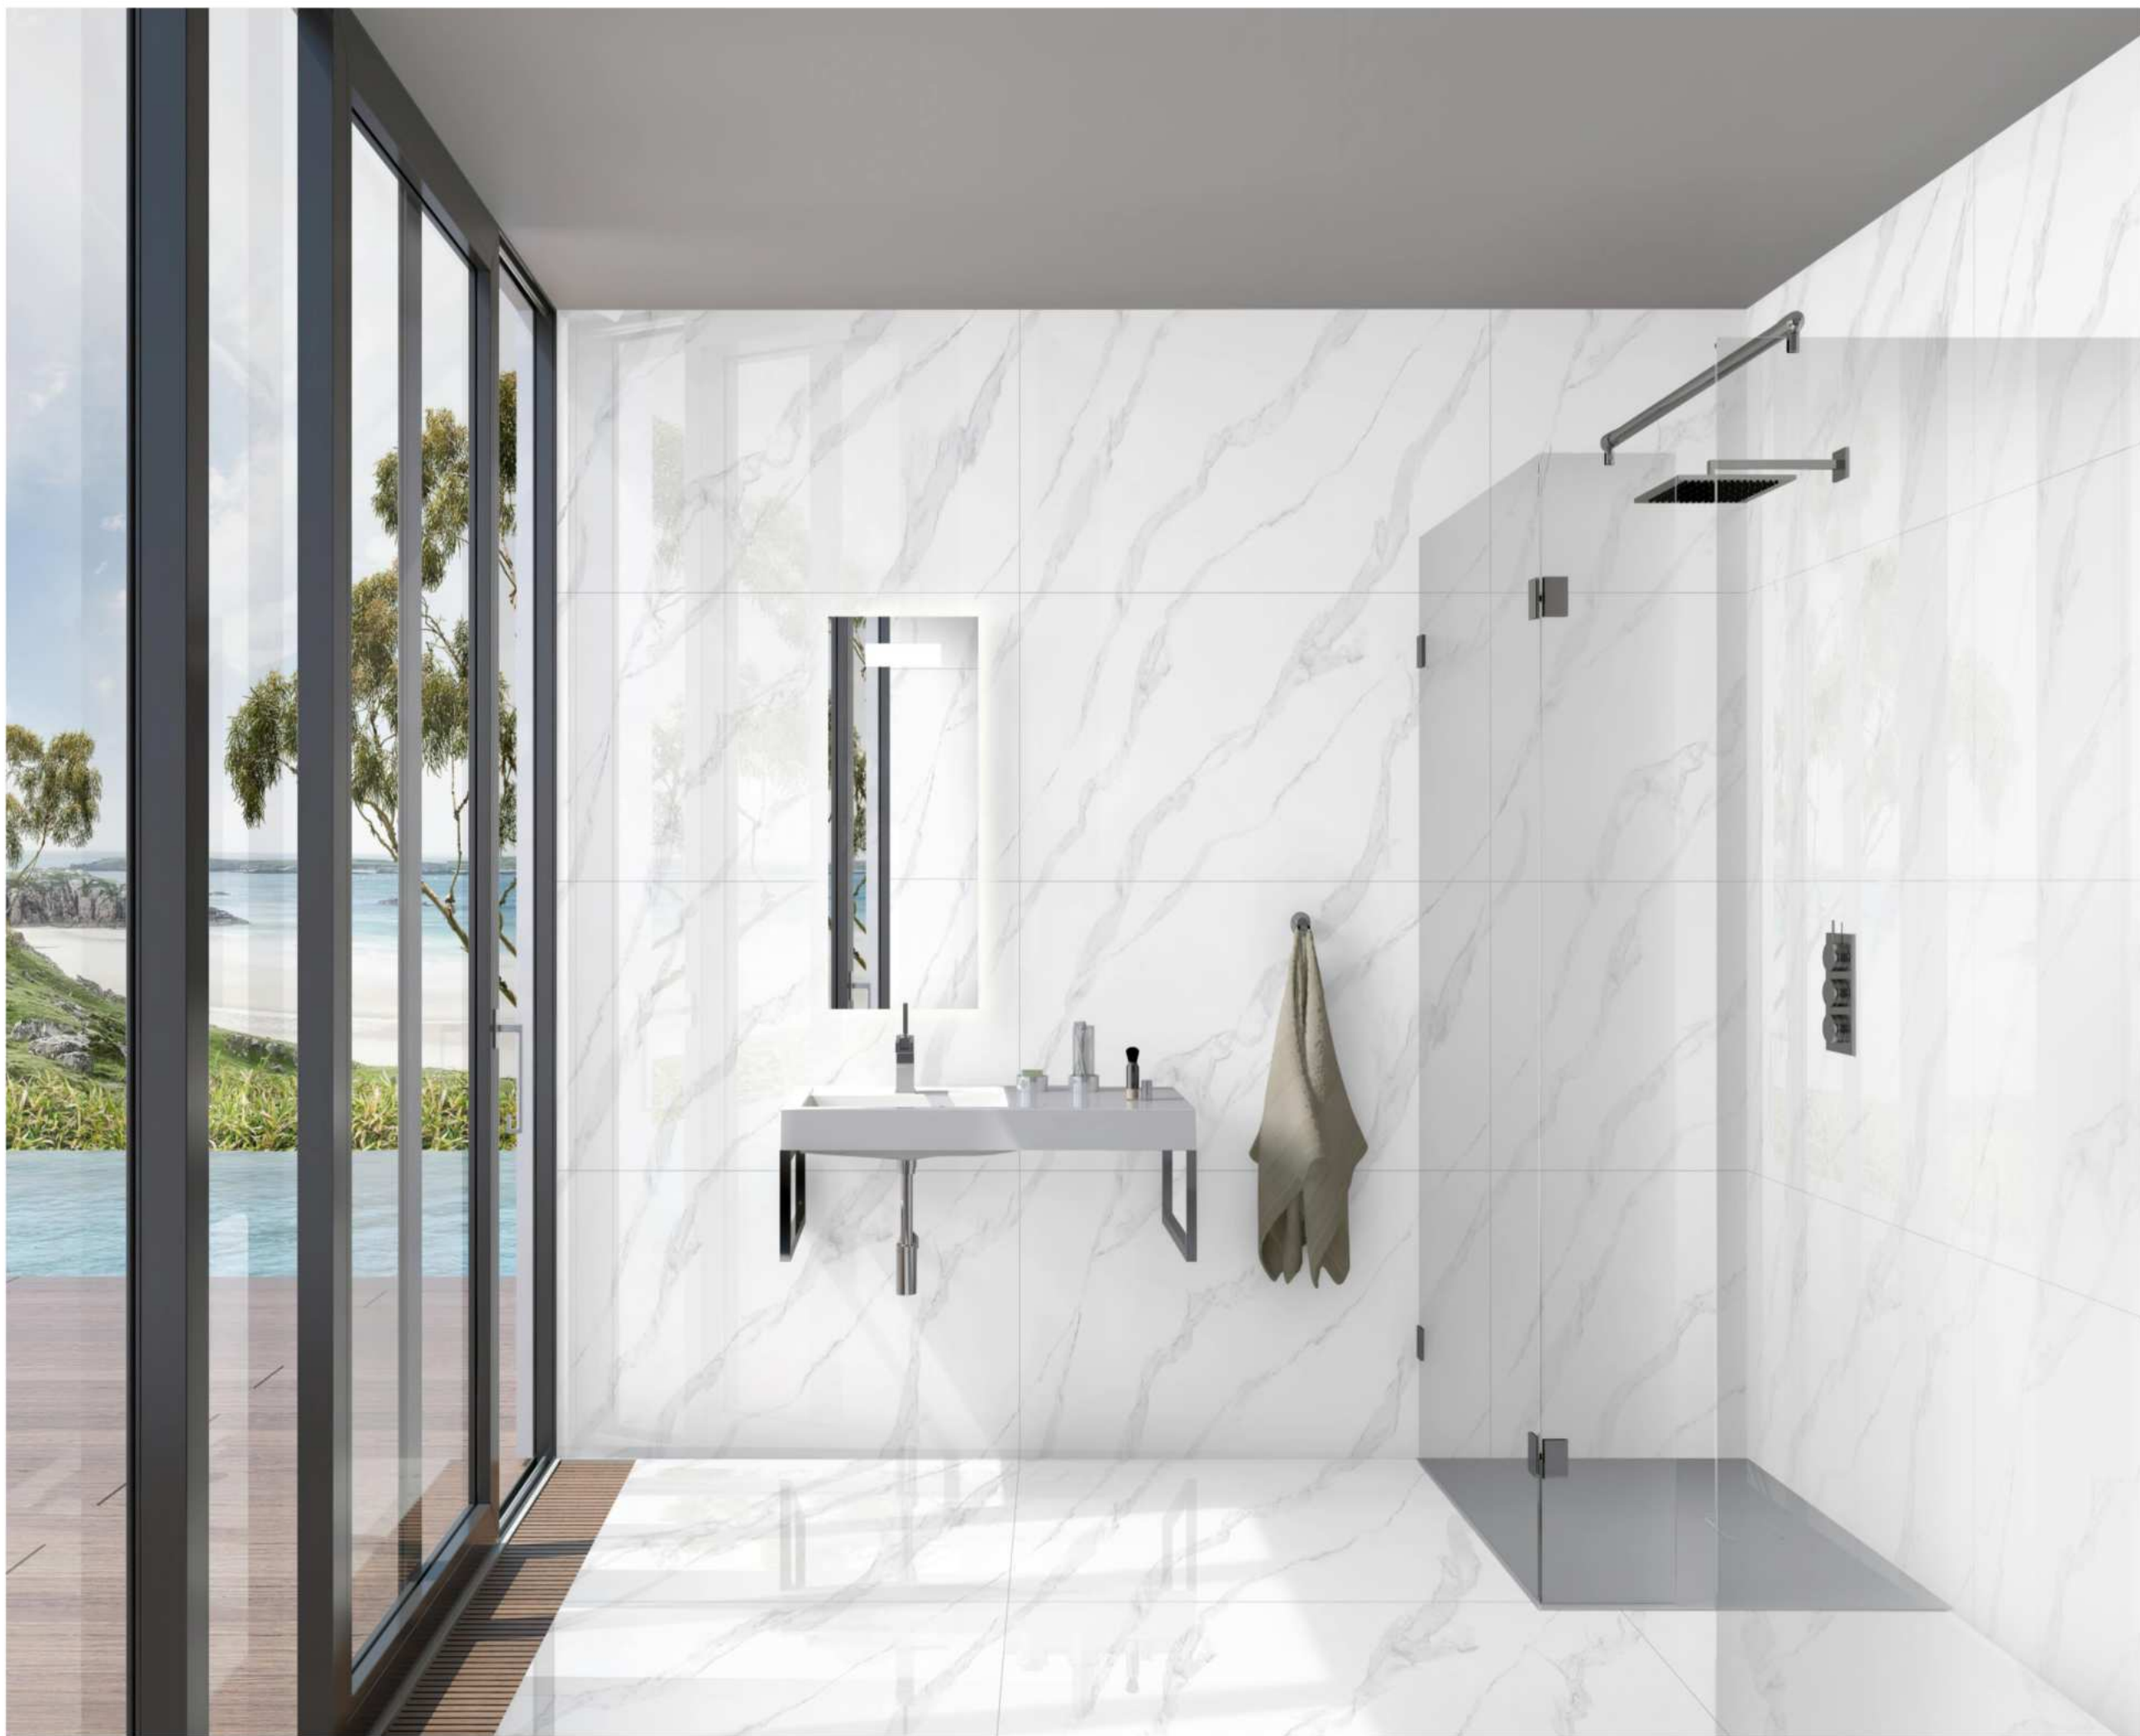



Endless Statuario  
Collection

TANGO GREY

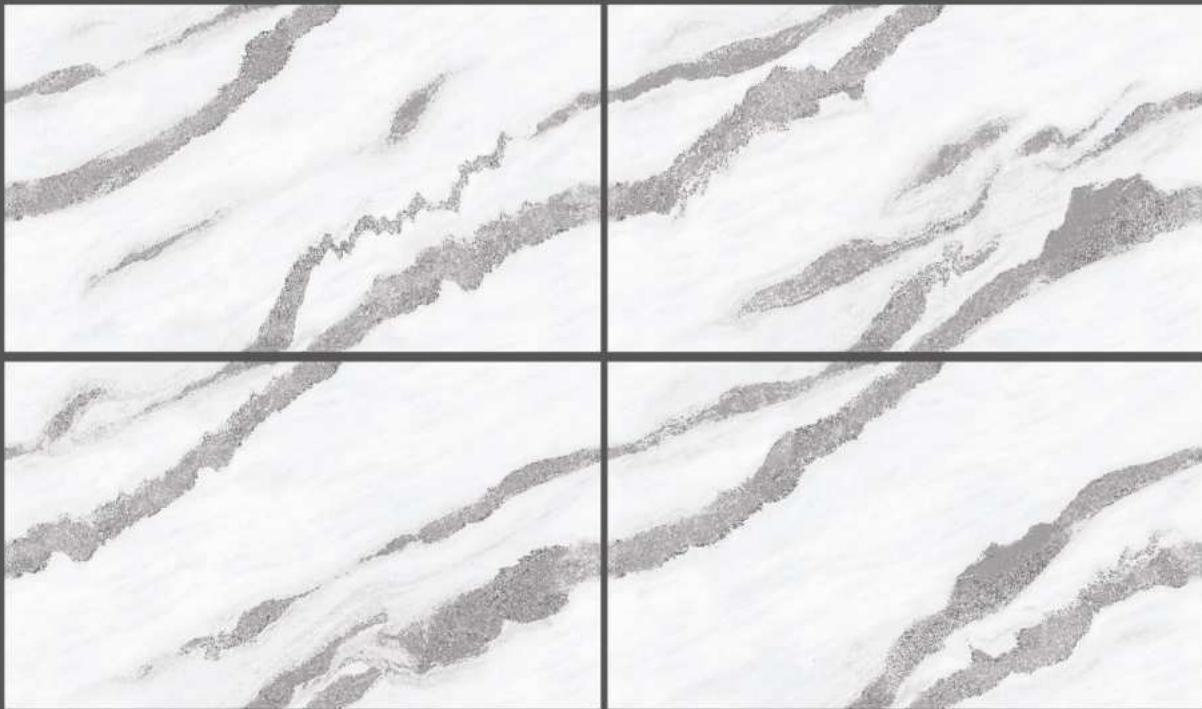

Size : 600X1200MM  
Finish : GLOSSY

RANDOM : 04  
THICKNESS : 9MM

TANGO BLACK



TILES FEATURES







#Product Book


Wall & Floor:  
TANGO BLACK

Surface:  
GLOSSY



Endless Statuario  
Collection


VALING BLUE

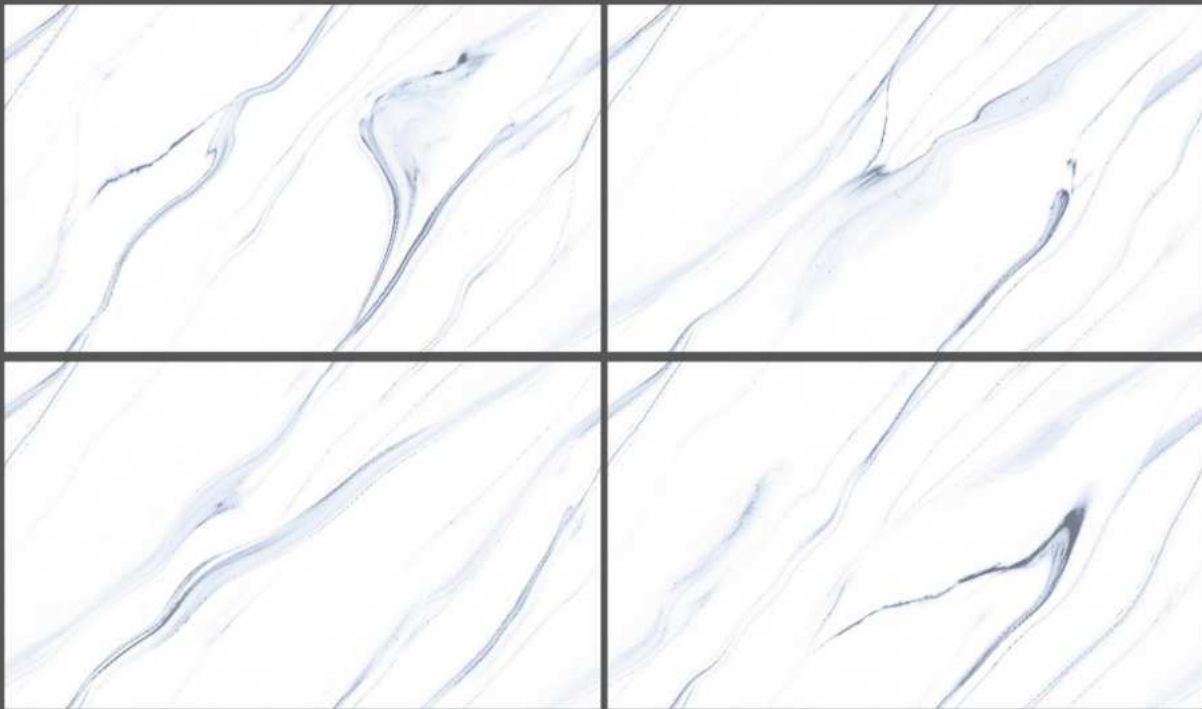

Size : 600X1200MM  
Finish : GLOSSY

RANDOM : 04  
THICKNESS : 9MM

VALING BLACK

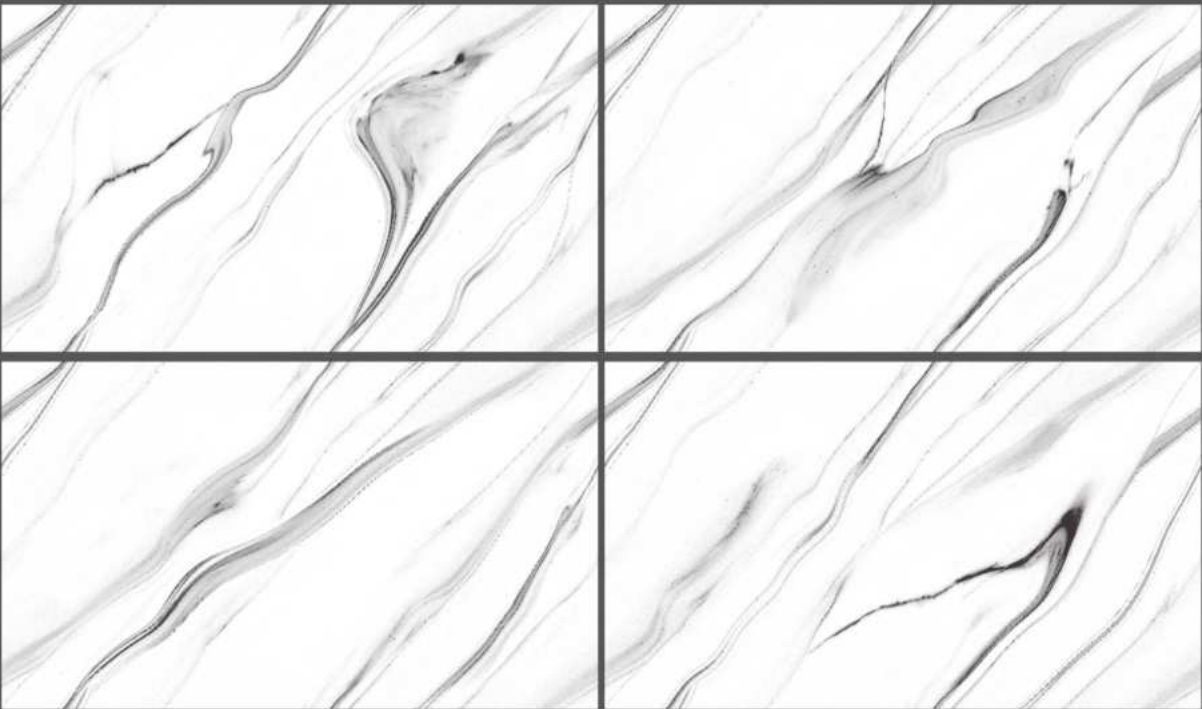

TILES FEATURES





Wall & Floor:  
VALING BLACK

Surface:  
GLOSSY





Endless Statuario  
Collection

VALING BROWN



Size : 600X1200MM  
Finish : GLOSSY

RANDOM : 04  
THICKNESS : 9MM

VITRO GREY



TILES FEATURES





#Product Book

Wall & Floor:  
VALING BROWN

Surface:  
GLOSSY





Endless Statuario  
Collection

VESTAL BROWN



Size : 600X1200MM  
Finish : GLOSSY

RANDOM : 04  
THICKNESS : 9MM

VESTAL GREY



TILES FEATURES







#Product Book

Floor  
VESTAL BROWN

Surface:  
GLOSSY



## TECHNICAL SPECIFICATION

| CHARACTERISTIC                                                 | STANDARD AS PER<br>ISO 13006:2018/<br>EN14411 Gr.BIa | MEAN VALUE OF                                                          | TEST METHOD    |
|----------------------------------------------------------------|------------------------------------------------------|------------------------------------------------------------------------|----------------|
| <b>Regulatory Properties</b>                                   |                                                      |                                                                        |                |
| Deviation in length and width                                  | ± 0.30 % (±1.00mm)                                   | ± 0.10 %                                                               | ISO 10545-2    |
| Deviation in thickness                                         | ± 5.00 % (±0.50mm)                                   | ± 4.00 %                                                               | ISO 10545-2    |
| Straightness in side                                           | ± 0.30 % (±0.80mm)                                   | ± 0.10 %                                                               | ISO 10545-2    |
| Rectangularity                                                 | ± 0.30 % (±1.50mm)                                   | ± 0.10 %                                                               | ISO 10545-2    |
| Surface flatness central curvature                             | ± 0.40 % (±1.80mm)                                   | ± 0.20 %                                                               | ISO 10545-2    |
| Surface flatness edge curvature                                | ± 0.40 % (±1.80mm)                                   | ± 0.20 %                                                               | ISO 10545-2    |
| Surface flatness warpage                                       | ± 0.40 % (±1.80mm)                                   | ± 0.10 %                                                               | ISO 10545-2    |
| Surface quality                                                | > 95% defects free                                   | > 95% defects free                                                     | ISO 10545-2    |
| Small Color Difference(For Plain Color)                        | ΔE <1.00                                             | ΔE < 0.30                                                              | ISO 10545-16   |
| Glossiness (Polished)                                          | as per mfg.                                          | Gloss Value > 90                                                       | Glossmeter 60° |
| Glossiness (Matt)                                              | as per mfg.                                          | 3° < GLOSS < 7°                                                        | Glossmeter 60° |
| Glossiness (satin/Posh)                                        | as per mfg.                                          | 7° < GLOSS < 18°                                                       | Glossmeter 60° |
| <b>Structural Properties</b>                                   |                                                      |                                                                        |                |
| Water absorption                                               | 0.50 % ≤ Ev ≤ 3.00 %                                 | 0.060 % ≤ Ev ≤ 3.00 %                                                  | ISO 10545-3    |
| Bulk density                                                   | as per mfg.                                          | > 2.28 gm/cc                                                           | ISO 10545-3    |
| <b>Massive Mechanical Properties</b>                           |                                                      |                                                                        |                |
| Modulus of rupture                                             | Min. 30.0 N/mm <sup>2</sup>                          | Min. 35.0 N/mm <sup>2</sup>                                            | ISO 10545-4    |
| Breaking strength thickness ≥7.5                               | Min. 700.0 N                                         | Min. 1000.0 N                                                          | ISO 10545-4    |
| Breaking strength thickness ≥7.5                               | Min. 1100.0 N                                        | Min. 1300.0 N                                                          | ISO 10545-4    |
| Breaking strength thickness ≥7.5(For ≥15mm)                    | Min. 1100.0 N                                        | Min. 1800.0 N                                                          | ISO 10545-4    |
| <b>Surface Mechanical Properties</b>                           |                                                      |                                                                        |                |
| MOH'S hardness                                                 | as per mfg.                                          | Polished Min 4* /<br>Satin,Posh & Matt Min 6                           | BS EN 15771    |
| Surface abrasion resistance                                    | as per mfg.                                          | Polish Min. Class 2, Satin & Posh<br>Min. Class 3, & Matt Min. Class 4 | ISO 10545-7    |
| Deep abrasion resistance                                       | Max. 175mm <sup>3</sup>                              | Max. 132mm <sup>3</sup>                                                | ISO 10545-6    |
| <b>Thermal Hydrometric Properties</b>                          |                                                      |                                                                        |                |
| Moisture expansion                                             | Max. 0.06%(0.6mm/m)                                  | 0.02mm/m                                                               | ISO 10545-10   |
| Thermal expansion(COE) at 100°C                                | as per mfg.                                          | Max. 6.0 x 10 <sup>-6</sup>                                            | ISO 10545-8    |
| Thermal shock resistance                                       | Min. 10 Cycle                                        | Min. 10 Cycle                                                          | ISO 10545-9    |
| Impact resistance(COR)                                         | Min. 0.55                                            | Min. 0.55                                                              | ISO 10545-5    |
| Frost resistance                                               | as per mfg.                                          | Frost Proof                                                            | ISO 10545-12   |
| <b>Chemical Properties</b>                                     |                                                      |                                                                        |                |
| Resistance to staining glazed                                  | Min. Class 3                                         | Min. Class 4                                                           | ISO 10545-14   |
| Resistance to household chemicals & swimming pool salts glazed | Min. Class GB                                        | Min. Class GA                                                          | ISO 10545-13   |
| Resistance to low concentrate acid and alkalis glazed          | as per mfg.                                          | Min. Class GLA**                                                       | ISO 10545-13   |
| Resistance to high concentrate acid and alkalis unglazed       | as per mfg.                                          | Min. Class GHB**                                                       | ISO 10545-13   |
| <b>Safety Properties</b>                                       |                                                      |                                                                        |                |
| Skid resistance<br>(COF-WET PENDULAM)##                        | as per mfg.                                          | Glossy P0(<12),Satin, Posh<br>≥P1(12-24) Matt ≥P2(25-34)               | BS 7976-2      |
| Slip resistance - (Satin / Matt (DCOF)<br>(R value)##          | as per mfg.                                          | R9 to R13**                                                            | DIN 51130      |
| Fire resistance                                                | as per mfg.                                          | Fire Proof                                                             | N.A.           |

## PACKING DETAILS

| PRODUCT  | SIZE           | THICKNESS | TILES / BOX | COVERAGE AREA / BOX | WEIGHT                |
|----------|----------------|-----------|-------------|---------------------|-----------------------|
| GVT-PGVT | 600x<br>1200mm | 8.5mm     | 2 pcs.      | 1.44 sq. mtr.       | 27.300 KG<br>(APPROX) |