

About us

is a leading provider of high-quality ceramic tiles, specializing in the production and distribution of tiles sized 600x1200mm. With years of experience in the industry, we have established ourselves as a trusted name known for our commitment to quality, innovation, and customer satisfaction.

we understand the importance of selecting the perfect tiles to enhance your spaces. Our extensive range of ceramic tiles offers a wide variety of designs, colors, and finishes to suit every style and preference. Whether you're looking for sleek and modern tiles for a contemporary space or timeless classics for a more traditional setting, we have the perfect solution for you.

We take pride in our state-of-the-art manufacturing facilities and cutting-edge technology, allowing us to produce tiles that meet the highest standards of durability, strength, and aesthetic appeal. Our tiles are crafted using premium quality materials and undergo rigorous quality control measures to ensure superior performance and longevity.

Company statistics

1000+

JOT


Happy Clients

30+

Export Countries





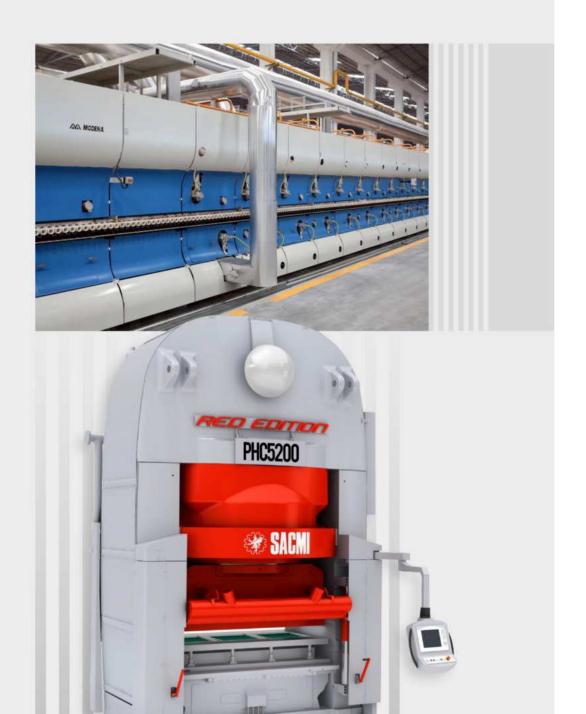

WHERE INNOVATION MEETS TECHNOLOGY

Where innovation meets technology, our tile solutions redefine the possibilities for your space. With cutting-edge designs and advanced manufacturing techniques, our tiles combine the best of both worlds. Experience the seamless integration of style and functionality, pushing the boundaries of design with our innovative tile solutions.

AYA MODENA







Features



9MM Thickness



Frost Resistance



High Load Resistance



Thermal Impact



Anti-slip Finish



Removable & Reuse



Easy to Install



Chemical Resistance




Ecological Finish



Fire Proof



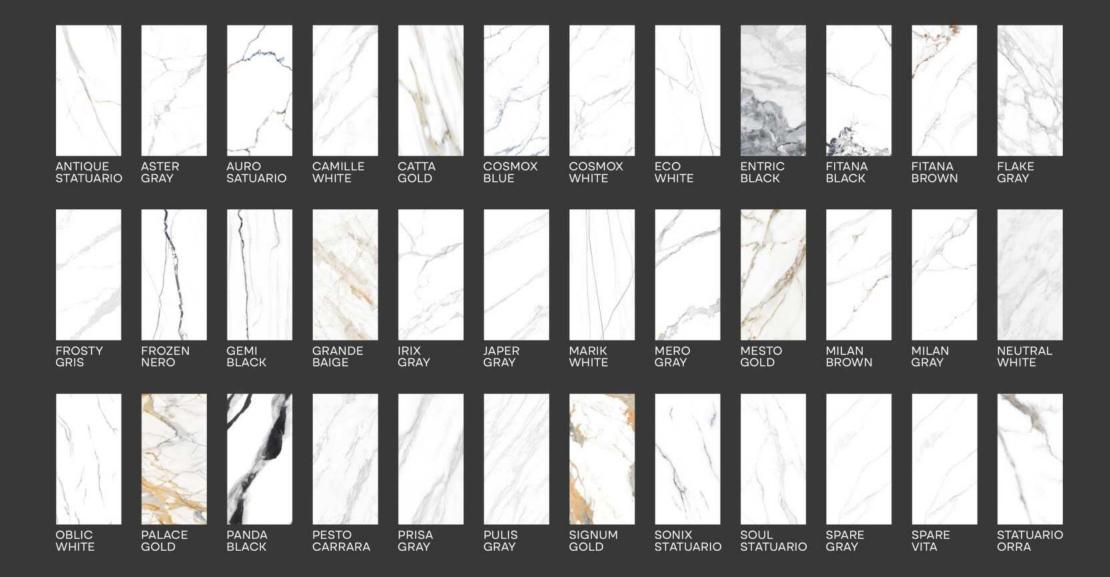




ANTIQUE STATUARIO



DIMENSION **600x1200 mm** 2'x4' 24"x48" RANDOM FACES

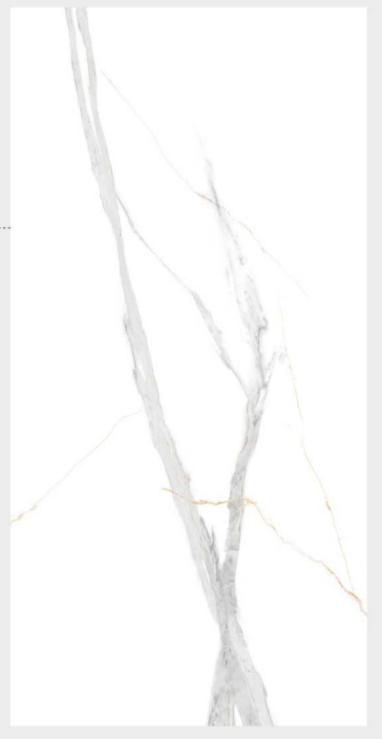



ASTER GRAY



DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES








AURO SATUARIO



DIMENSION **600x1200 mm** 2'x4' 24"x48" RANDOM FACES

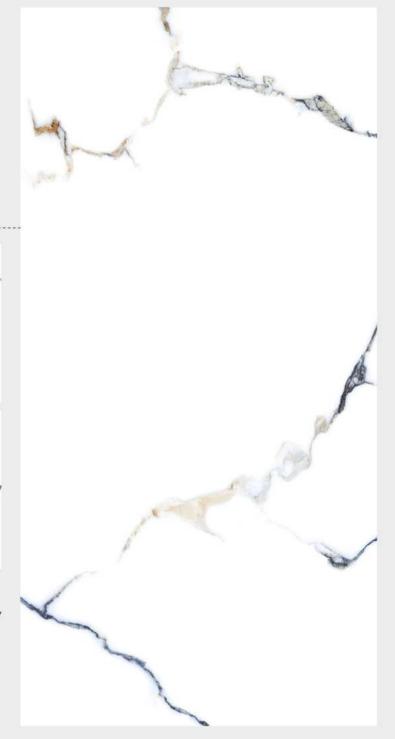




CAMILLE WHITE



DIMENSION **600x1200 mm** 2'x4' 24"x48"


RANDOM FACES

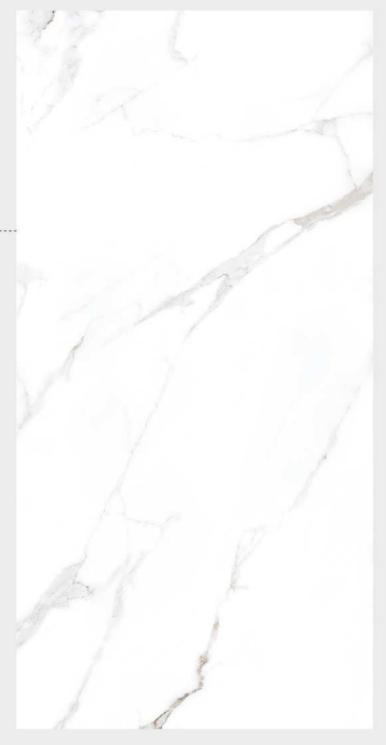






CATTA GOLD

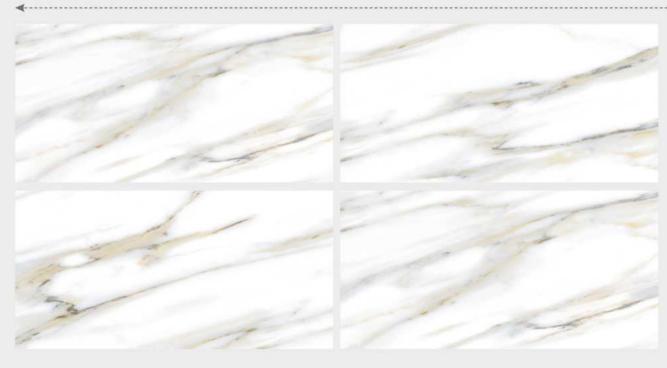


DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES

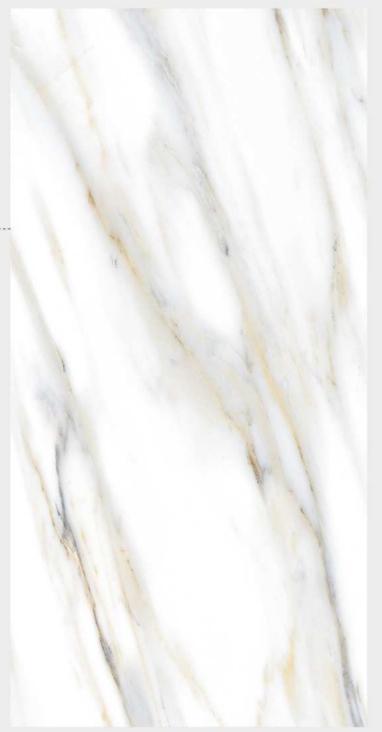




COSMOX BLUE

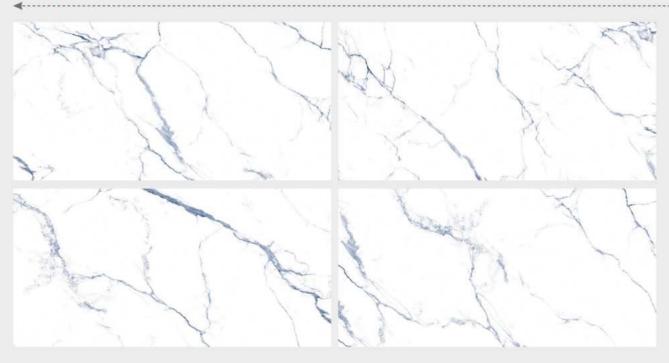

DIMENSION **600x1200 mm** 2'x4' 24"x48"


RANDOM FACES

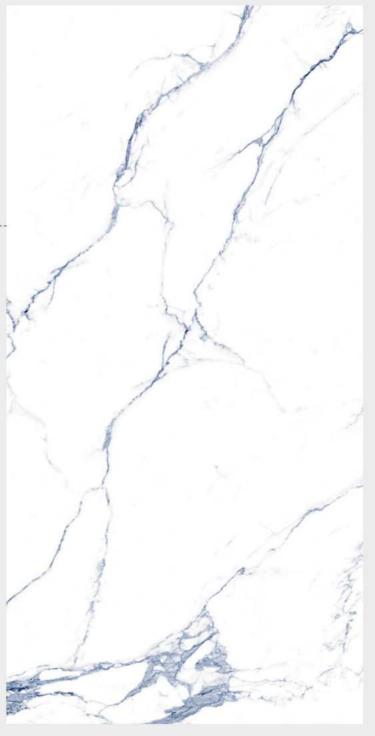





COSMOX WHITE

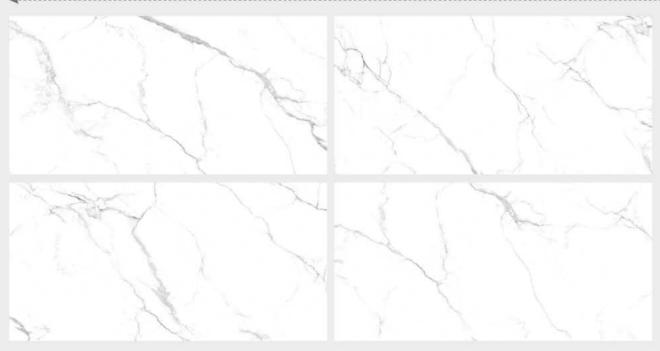


DIMENSION **600x1200 mm** 2'x4' 24"x48" RANDOM FACES





ECO WHITE

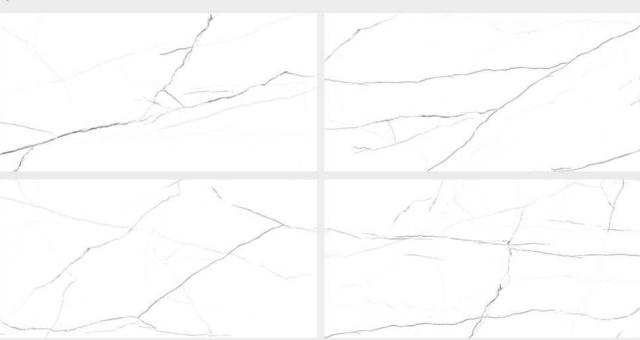

DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES







ENTRIC BLACK




DIMENSION **600x1200 mm** 2'x4' 24"x48" RANDOM FACES






FITANA BLACK

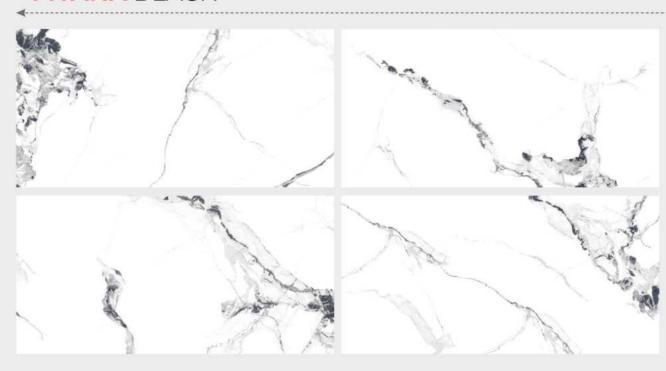

DIMENSION **600x1200 mm** 2'x4' 24"x48"


RANDOM FACES

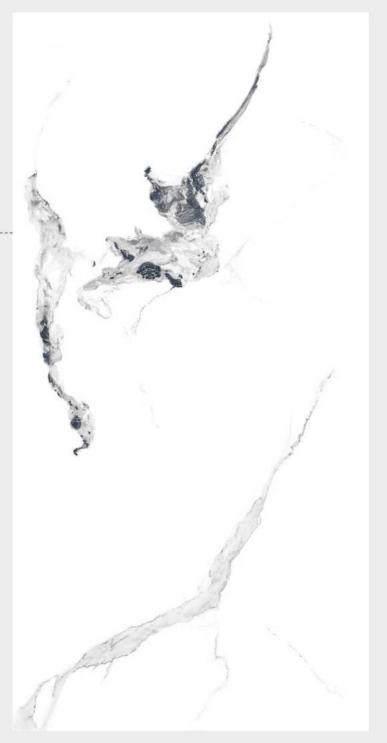






FITANA BROWN

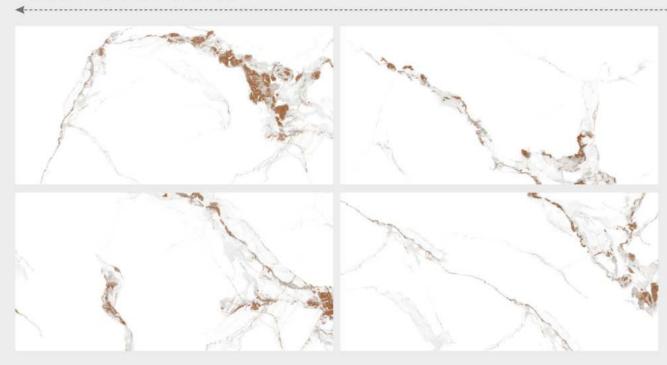

DIMENSION **600x1200 mm** 2'x4' 24"x48" RANDOM FACES

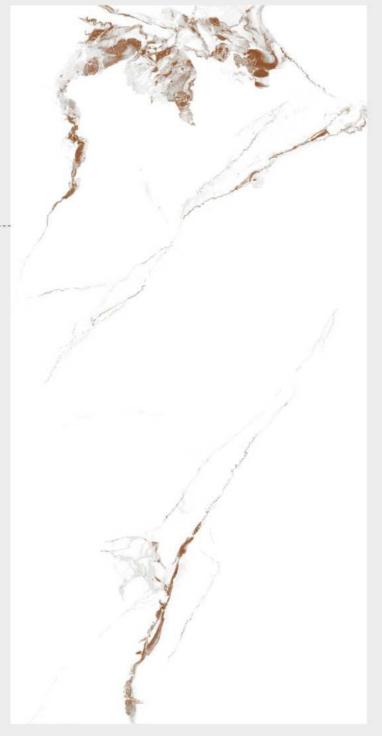




FLAKE GREY



DIMENSION **600x1200 mm** 2'x4' 24"x48" RANDOM FACES

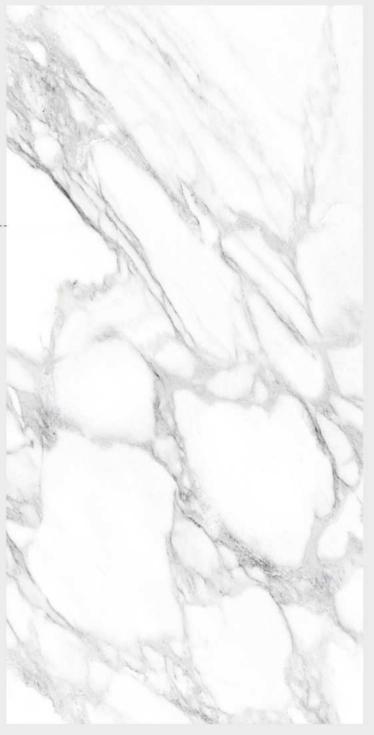





FROSTY GRIS




DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES





FROZEN NERO

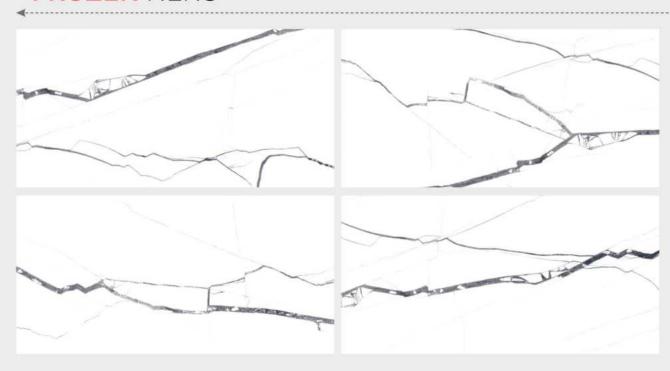


DIMENSION **600x1200 mm** 2'x4' 24"x48" RANDOM FACES








GEMI BLACK

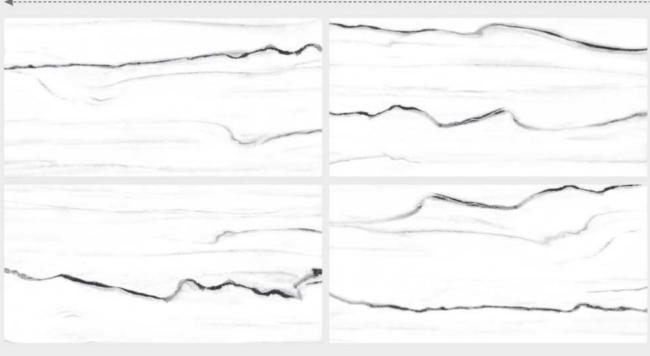

DIMENSION **600x1200 mm** 2'x4' 24"x48" RANDOM FACES

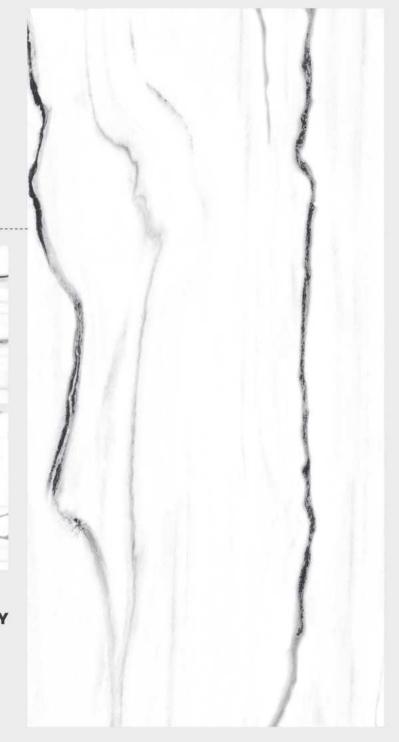



GRANDE BAIGE



DIMENSION **600x1200 mm** 2'x4' 24"x48" RANDOM FACES







IRIX GRAY



DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES





JAPER GRAY



DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES





MARIK WHITE



DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES





MERO GRAY



DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES








MESTO GOLD



DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES

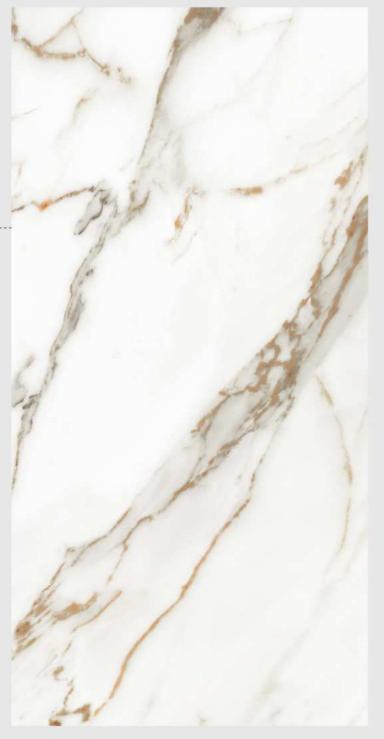




MILAN BROWN



DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES

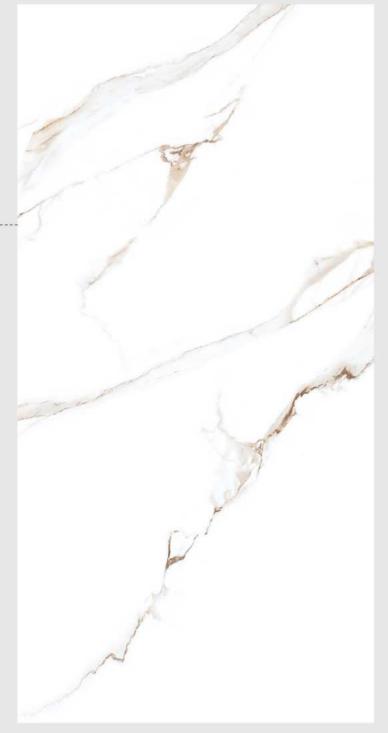






MILAN GRAY




DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES

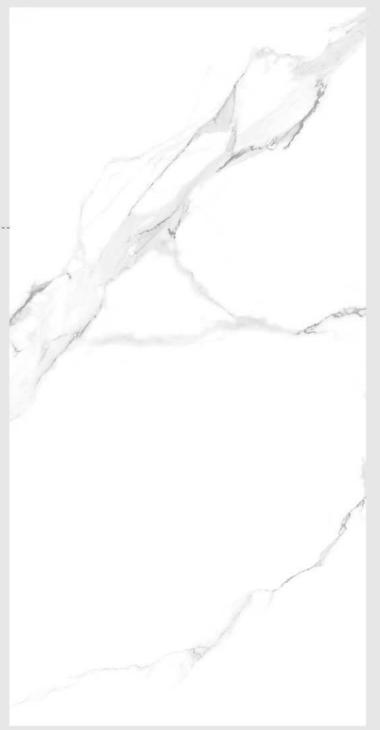




NEUTRAL WHITE

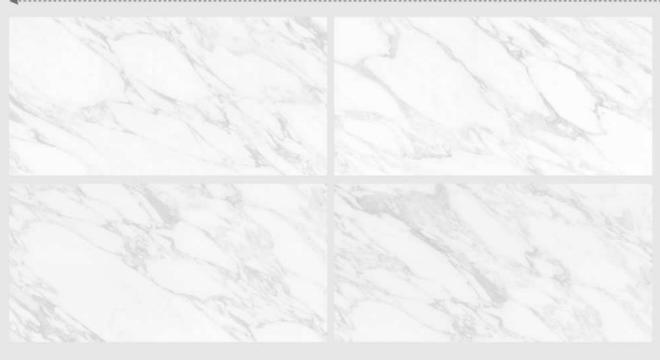

DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES

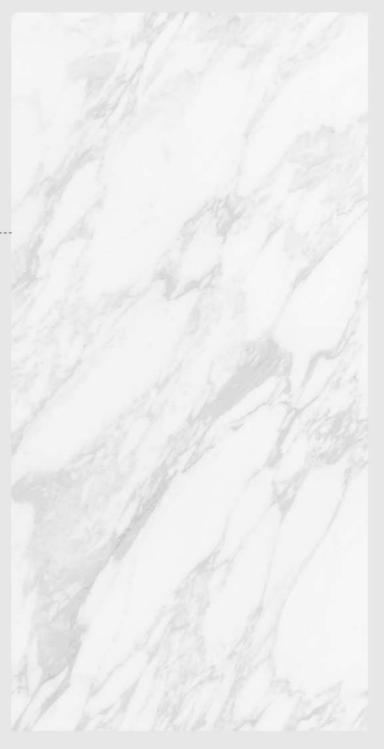






OBLIC WHITE




DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES

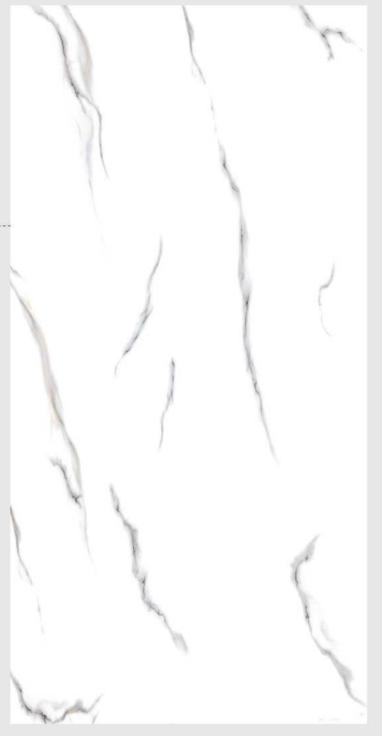



PALACE GOLD

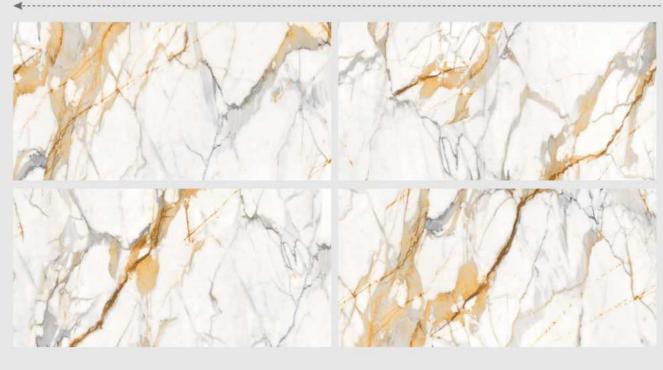

DIMENSION **600x1200 mm** 2'x4' 24"x48"


RANDOM FACES








PANDA BLACK

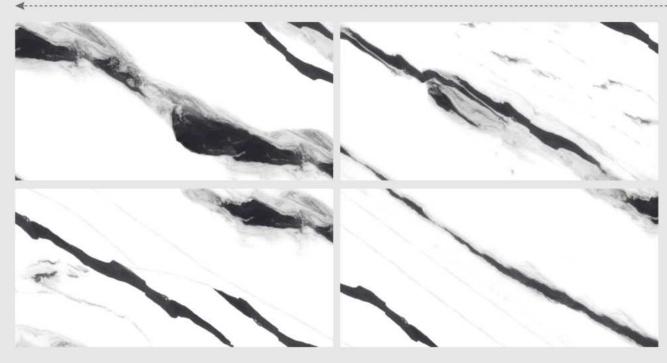

DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES

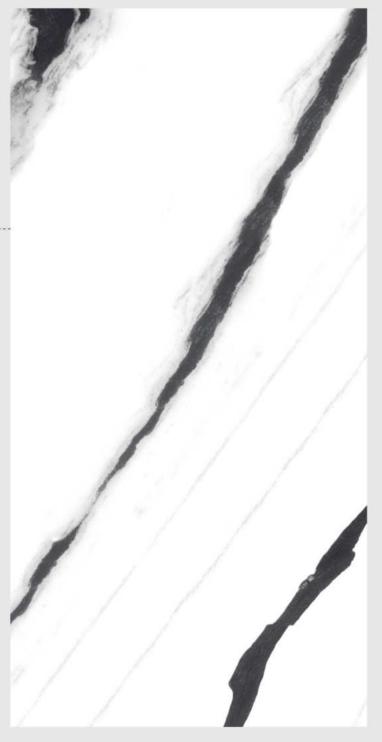




PESTO CARRARA



DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES

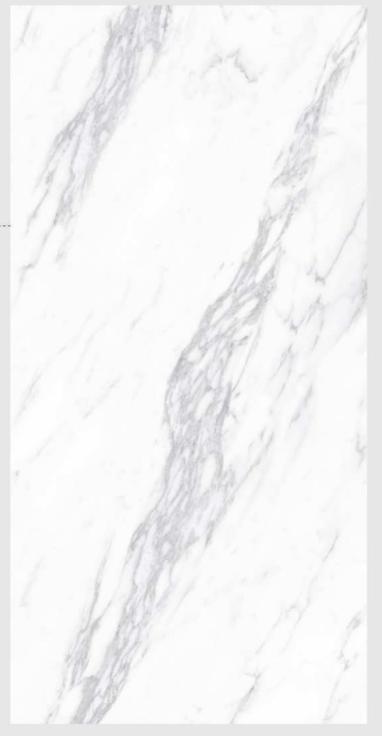






PRISA GREY



DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES

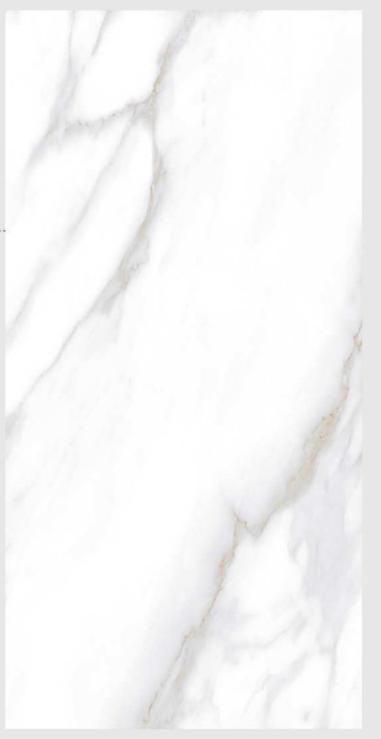




PULIS GREY



DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES



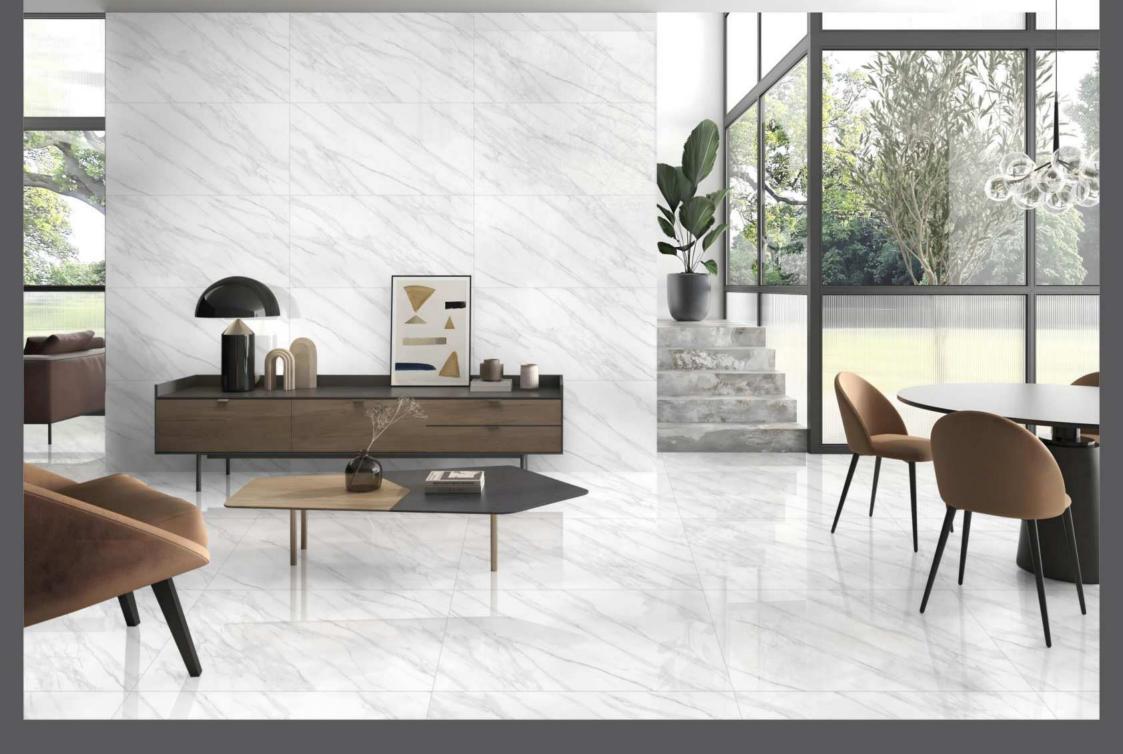




SIGNUM GOLD




DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES

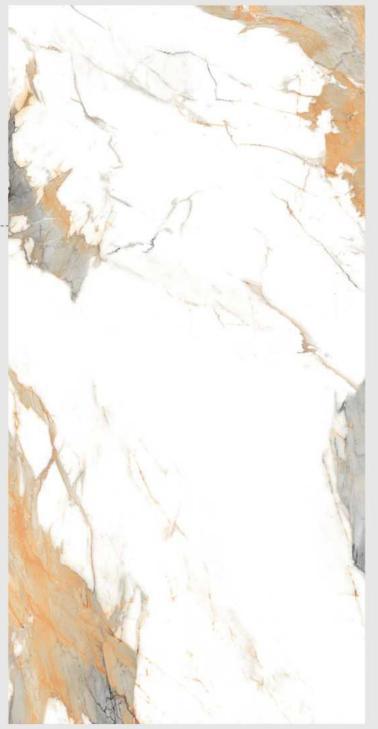




SONIX STATUARIO

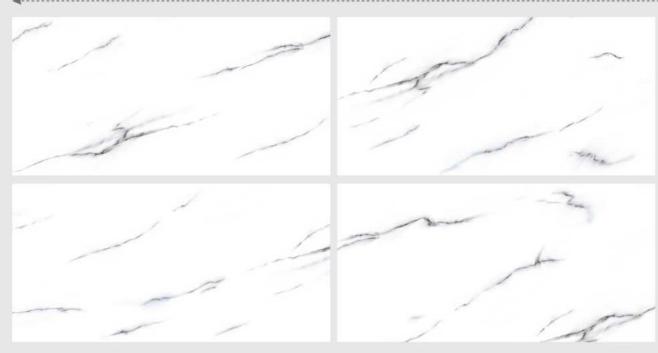

DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES

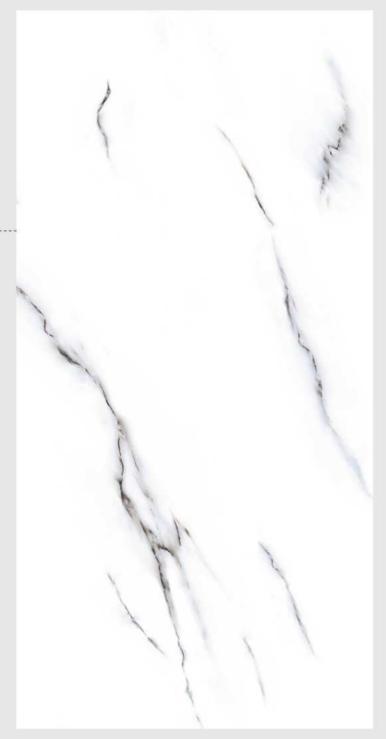






SOUL STATUARIO



DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES

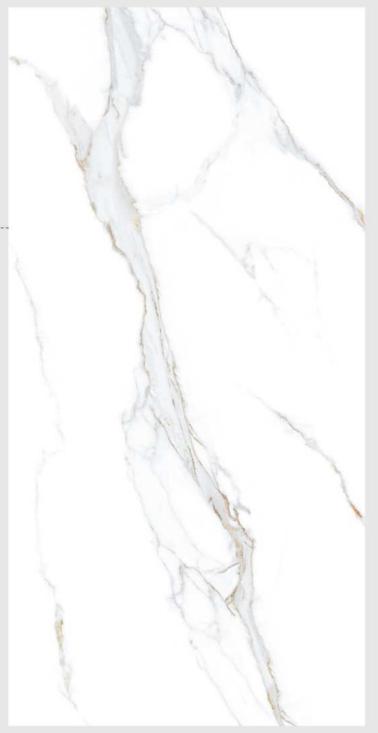



SPARE GREY



DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES





SPARE VITA




DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES




STATUARIO ORRA

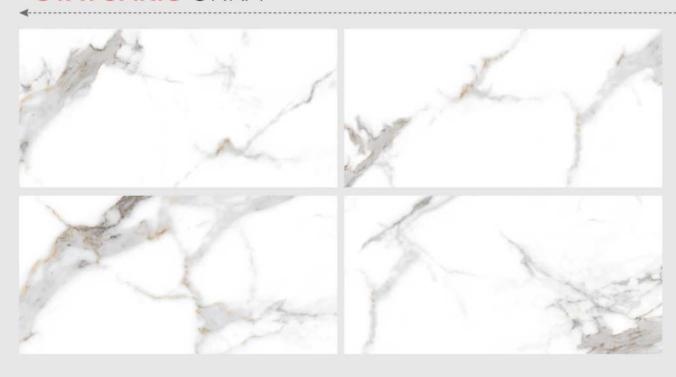

DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES

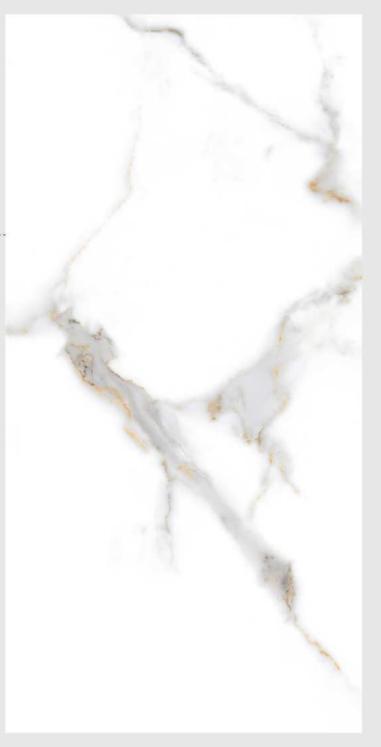






VENATO NATURAL



DIMENSION **600x1200 mm** 2'x4' 24"x48"

RANDOM FACES

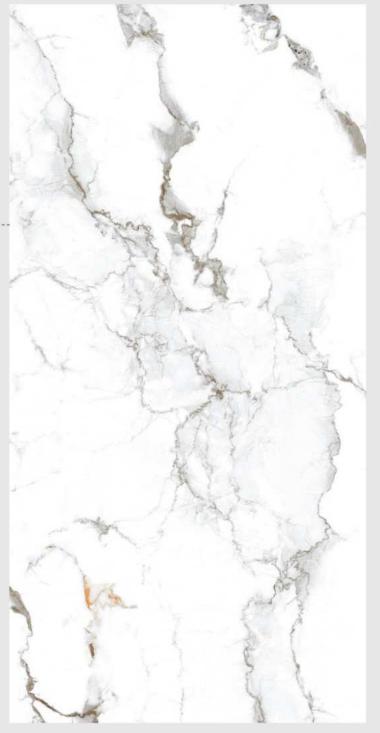



It has the ability to resist deformation under load. It deforms significantly but does not break



It is the core feature it helps to give the perfect finish to edges while cutting.



This provides the surface to tolerate the impact of objects falling on them.



It is durable and easier to clean and retain the original exquisiteness every time.



Our tiles are coated with liquid glass and hence absorb less water.



This creation is super easy to apply it can be applied without any tool or laying instructions.



they are porous and absorb water easily. These tiles have relatively high frost resistance.



SCRATCH RESISTANCE

It is highly recommended for its scratch resistance property.



SLIP RESISTANCE

Our tiles have an abrasive grit on their surface, increasing their slip resistance significantly.



CHEMICAL RESISTANCE

Its highly resistant to harsh chemical agents like alkalis, acids, household chemicals, and swimming pool salts.



EASY TO

It's highly convenient as it is easy to clean and it provides comfort with ease.



ECO LOGICAI

We are committed to the environment and recognize that sustainablity is a significant and crucial part of our journey.



TECHNICAL SPECIFICATION

We are delighted to introduce our latest line of high-quality tiles, designed to meet the exacting standards of our esteemed clientele. we pride ourselves on delivering superior products that combine functionality, durability and aesthetic appeal.

600X1200MM

TILES IN EVERY SPACE

We understand that choosing the right tiles for specific application areas is crucial for achieving both functionality and aesthetic appeal. That's why we're delighted to introduce you to our comprehensive selection of tiles designed to excel in various environments:





























DRY LAYING
ON
GRASS



GARVEL



SCREED WITH ADHESIVE



RAISED FLOOR



TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO13006:2018/ EN14411 Gr.Bla	MEAN VALUE OF	TEST METHOD
Regulatory Properties	2		
Deviation in length and width			ISO 10545-2
Deviation in thickness	± 5.00 % (±0.50mm)	± 4.00 %	ISO 10545-2
itraightness in side	± 0.30 % (±0.80mm)	± 0.10 %	ISO 10545-2
Rectangularity	± 0.30 % (±1.50mm)	± 0.10 %	150 10545-2
Surface flatness central curvature	± 0.40 % (±1.80mm)	± 0.20 %	ISO 10545-2
urface flatness edge curvature	± 0.40 % (±1.80mm)	± 0.20 %	ISO 10545-2
urface flatness warpage	± 0.40 % (±1.80mm)	± 0.10 %	ISO 10545-2
urface quality	> 95% defects free	> 95% defects free	ISO 10545-2
mall Color Difference(For Plain Color)	ΔE <1.00	ΔE < 0.30	ISO 10545-16
Hossiness (Polished)	as per mfg.	Gloss Value > 90	Glossmeter 60°
Plassiness (Matt)	as per mfg.	3° < GLOSS < 7°	Glossmeter 60°
Plassiness (satin/Pash)	as per mfg.	7" < GLOSS < 18°	Glossmeter 60°
tructural Properties			
Vater absorption	0.50 % ≤ Ev ≤ 3.00 %	0.060 % ≤ Ev ≤ 3.00 %	ISO 10545-3
ulk density	as per mfg.	> 2.28 gm/cc	ISO 10545-3
Massive Mechanical Properties	100000000000000000000000000000000000000		The same control of the same o
Aodulus of rupture	Min. 30,0 N/mm ²	Min. 35.0 N/mm ²	ISO 10545-4
reaking strength thickness ≥7.5	Min. 700.0 N	Min. 1000.0 N	ISO 10545-4
reaking strength thickness ≥7.5	Min. 1100.0 N	Min. 1300.0 N	ISO 10545-4
reaking strength thickness ≥7.5(For ≥15mm)	Min. 1100.0 N	Min. 1800.0 N	ISO 10545-4
ourface Mechanical Properties		ALTWEST SESSION	
AOH'S hardness	as per mfg.	Polished Min 4" / Satin, Posh & Matt Min 6	BS EN 15771
surface abrasion resistance	as per mfg.	Polish Min. Class 2, Satin & Posh Min. Class 3, & Matt Min. Class 4	ISO 10545-7
Deep abrasion resistance	Max. 175mm 3	Max. 132mm ³	ISO 10545-6
hermal Hydrometric Properties		/	
Noisture expansion	Max. 0.06%(0.6mm/m)	0.02mm/m	ISO 10545-10
hermal expansion(COE) at 100°C	as per mfg.	Max. 6.0 x 10°	ISO 10545-8
hermal shock resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
mpact resistance(COR)	Min. 0.55	Min. 0.55	ISO 10545-5
rost resistance	as per mfg.	Frost Proof	ISO 10545-12
Chemical Properties	1	The second second	111000000000000000000000000000000000000
Resistance to staining glazed	Min. Class 3	Min. Class 4	ISO 10545-14
esistance to household chemicals & wimming pool salts glazed	Min. Class GB	Min. Class GA	ISO 10545-13
tesistance to law concentrate acid and alkalis glazed	as per mfg.	Min. Class GLA** Min. Class GHB**	ISO 10545-13
tesistance to high concentrate acid and alkalis unglazed			ISO 10545-13
afety Properties			
ikid resistance COF-WET PENDULAM)##	as per mfg.	Glossy P0(<12),Satin, Posh ≥P1(12-24) Matt ≥P2(25-34)	BS 7976-2
ip resistance - (Satin / Matt (DCOF) as per mfg. value)##		R9 to R13**	DIN 51130
e resistance as per mfg.		Fire Proof N.A.	

PACKING DETAILS

PRODUCT	SIZE	THICKNESS	TILES / BOX	COVERAGE AREA / BOX	WEIGHT
GVT-PGVT	600x 1200mm	8.5mm	2 pcs.	1.44 sq. mtr.	27.300 KG (APPROX)